


LEVER LOCKSET WITH DEASSEMBLYABLE CYLINDER INSTALLATION INSTRUCTIONS

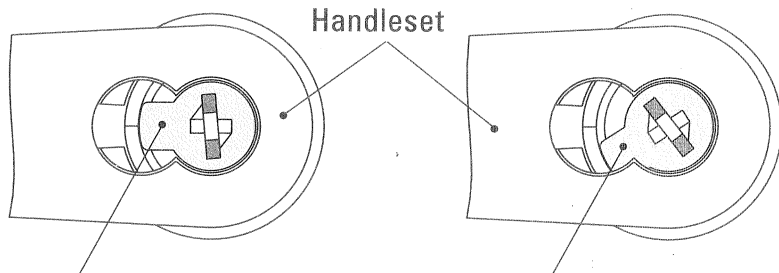

After the lock chassis is fully assembled and installed into a door, the tailpiece should face at this direction.

During the installation of the cylinder, the tailpiece should be facing at this direction.