



- Certifications**
- Certified ANSI/BHMA A156.3, Grade 1
 - cULus listed, Panic Exit
 - cULus listed, up to 3hr Fire Exit
 - Meets ADA/ANSI A117.1 for accessible operation
 - Meets California Building Code Sec. 11B-309.4
 - 10 Year limited warranty

- Rail Assembly**
- Steel rail assembly
 - Stainless steel assembly (32D finish)
 - Field sizable

- Handing**
- Non-handed

- Door Width**
- 30–38" (762–965 mm)
 - 36–48" (914–1219 mm) – option

- Door Height**
- Panic Exit: 120" (3048 mm) maximum
 - Fire Exit: 96" (2438 mm) maximum

- Door Thickness**
- 1 3/4" (45.5 mm)
 - 2 1/4" (57 mm) – available*

(*) Requires #9500KB363, see Parts & Accessories

- Stile Width**
- 4 1/2" (114 mm) minimum
- Measured from door edge*

- Projection**
- 2 1/2" (64 mm) from door surface

- Latchbolt**
- Stainless steel, 3/4" (19 mm) throw

- Strike**
- 9500PR: Steel, standard type #9500AS239
 - 9500FR: Steel, standard type #9500AS245

Other strikes available

- Dogging**
- For Panic Exit models only
 - Hex key dogging
 - Cylinder dogging¹ – available

(1) See 9500 Trims & Accessories

- Mounting Hardware**
- Machine and wood screws
 - Sex nut & thru-bolts¹ – available
 - Glass bead shim kit – available

(1) Included with 9500FR. Required for non-reinforced hollow metal doors.

- Electrical Options**
- Electric latch retraction – option
 - Alarm kit – available*
 - Request to exit – available*

(*) Sold separately, see 9500 Trims & Accessories

- Trims**
- Lever, knob, pull, plate, escutcheon and handleset trims available

Sold separately, see 9500 Trims & Accessories

- Finish**
- 19–Matte black, painted; 28–Aluminum, painted; 32D–Satin Stainless Steel

Other finishes available by special order


9500PR	3	–	28
MODEL ¹	SIZE ¹		FINISH

(1) SEE SELECTION GUIDE

SELECTION GUIDE

MODEL		SIZE	DOOR WIDTH ¹	DOGGING	FINISH	/ CASE
9500PR	Panic Exit Hardware Rim device	3	30-38 (762-965)	●	19, 28, 32D	4
		4	36-48 (914-1219)	●	28, 32D	4
9500FR	Fire Exit Hardware ² Rim device	3	30-38 (762-965)	—	19, 28, 32D	4
		4	36-48 (914-1219)	—	28, 32D	4

(1) RECOMMENDED DOOR WIDTH, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT. (2) FIRE EXIT HARDWARE MUST BE INSTALLED ON FIRE EXIT LABELLED DOORS.

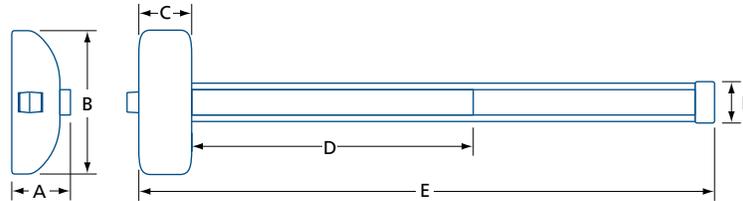

MODEL	A	B	C	D	E ¹	F
9500PR3 / FR3	2 1/2 (64)	7 11/16 (196)	2 11/16 (68)	21 13/16 (554)	32 1/2 (825)	2 1/8 (54)
9500PR4 / FR4				27 1/2 (699)	44 1/2 (1130)	

IN (MM) (1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS FOR DETAILS

PARTS & COMPONENTS

See 9500 Trims & Accessories for additional items.



9500ACPR
Main chassis cover for 9500PR.

9500ACFR
Main chassis cover for 9500FR.



9500KB357
Sex nut thru-bolt kit (6) for 1 3/4" (45.5mm) thick doors. Included with 9500FR.

9500KB363
Sex nut thru-bolt kit (6) for 2 1/4" (57mm) thick doors.



9500KG401
Glass bead shim kit for main chassis and end bracket.



9500AS200
Optional roller-type strike for 9500PR. Includes shim and mounting hardware.



9500AS239
Standard strike for 9500PR. Includes shim and mounting hardware.



9500AS245
Standard strike for 9500FR. Includes shim and mounting hardware.



9500AS251
Overlapping strike for double doors with paired panic exit devices, includes mounting hardware. Requires door coordinator (sold separately).

