



*SHOWN WITH OPTIONAL CYLINDER & COLLARS

- Certifications**
- Conforms to ANSI/BHMA A156.36, Grade 1
 - cULus listed, 3hr fire-rating
 - 5 Year limited warranty

Door Thickness • 1¼–2" (44.5–51 mm)

Handing • Non-handed

Backset • 2¾" (70 mm)

Deadbolt • Solid bolt
• 1" (25.4 mm) throw

Faceplate • 1¼ x 5⅞" (31.5 x 142 mm)
• Square corners

Strike • 1⅞ x 3½" (28.9 x 88.9 mm)
• Square corners
• Metal dust-box included

Trim • Cylinder collar and thumbturn available
• Round or square styles available

Sold separately, please contact for details

Chassis • Function 64: concealed mounting
All other functions: exposed mounting

Cylinder • Conventional and high security mortise cylinders available
• Small format interchangeable core (SFIC) mortise housing available (less core)
Sold separately, please contact for details

Functions 51 Single cylinder with thumbturn
55 Thumbturn only
60 Double cylinder
64 Cylinder only¹

(1) For use in rooms with more than one exit


Finish¹ 15–Satin nickel; 19–Matte black;
26D–Satin chrome

*Other finishes available by special order
(1) DMDBL strike and faceplate are 26D.
Trims are available in 15, 19, or 26D.*

DMDBL
SERIES

CONFIGURED TO ORDER – PLEASE CONTACT YOUR LOCAL SALES REPRESENTATIVE FOR DETAILS.

DIMENSIONS

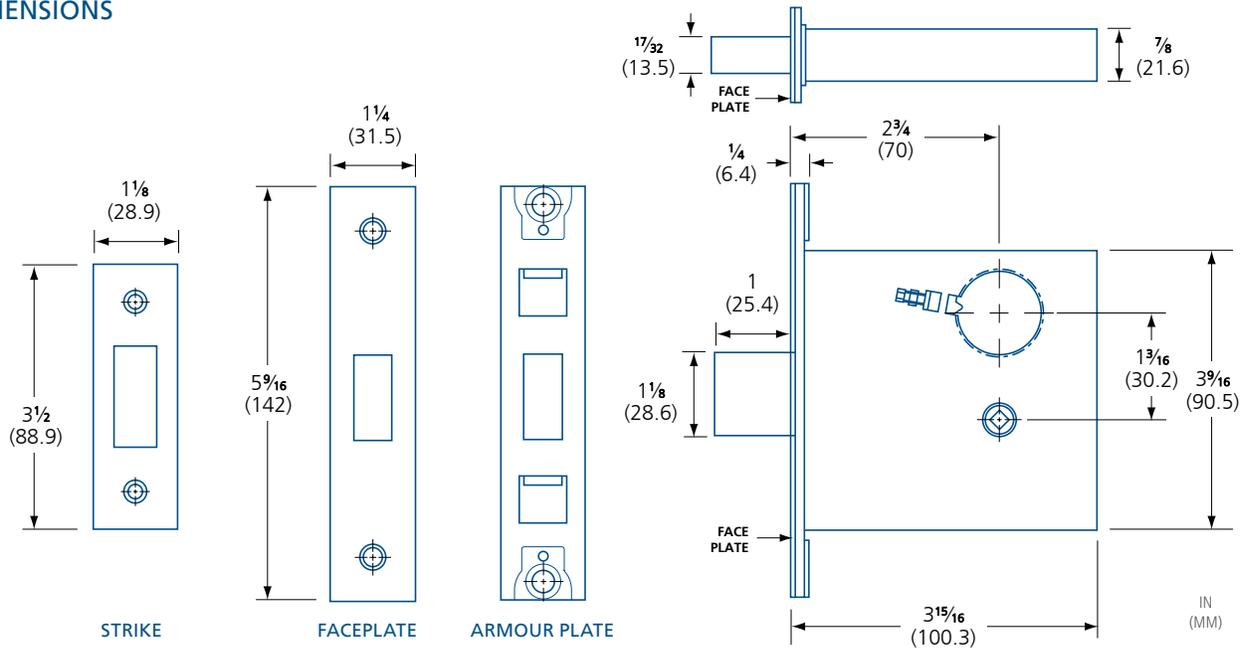

PARTS & ACCESSORIES



DM45X-PR
Mortise cylinder collar with spring; round.
Ø 1 1/16 x 3/8" (43x9 mm)
Finish: 15, 19, 26D



DM45X-PRS
Mortise cylinder collar with spring; square.
1 7/8 x 1 7/8 x 3/8" (48x48x9 mm)
Finish: 15, 19, 26D



DM00X-PSCYL

- 1 1/8" (28.6 mm) 5-pin (drilled 6) brass mortise cylinder; Schlage "C" with 2 keys.
- For installations on 1 3/4" (45 mm) thick doors.
- Includes DM00X-PCAM.
- Finish: 15, 19, 26D

DM00X-PECYL

- 1 1/4" (31.8 mm) 5-pin (drilled 6) brass mortise cylinder; Schlage "C" with 2 keys.
- For installations on 2" (51 mm) thick doors
- Includes DM00X-PCAM.
- Finish: 15, 19, 26D



DM00X-PCAM
Replacement mortise cylinder cam, with screws.

NOTE: OTHER CYLINDERS MAY REQUIRE A DIFFERENT CAM. PLEASE CONTACT IF USING A DIFFERENT CYLINDER. OTHER CAMS SOLD SEPARATELY.



DM45X-PT
Mortise lock thumbturn; round. Mounting screws included. Finish: 15, 19, 26D



DM45X-PTS
Mortise lock thumbturn; square. Mounting screws included. Finish: 15, 19, 26D



DM00X-PPRVI
Occupancy indicator. Includes round interior/ exterior trims for use with function 55. For 1 3/4" (44.5 mm) thick wood door. Mounting hardware included. Finish: 15, 26D



DM00X-PPRVIQ
Occupancy indicator. Includes square interior/ exterior trims for use with function 55. For 1 3/4" (44.5 mm) thick wood door. Mounting hardware included. Finish: 15, 26D



DM00X-PPRVI-ECYL
Keypad occupancy indicator. Includes round interior/exterior trims for use with keyed function 51. For 1 3/4" (44.5 mm) thick wood door. Mounting hardware and DM00X-ECYL Cylinder with 2 keys included. Finish: 15, 26D



DM00X-PPRVIQ-ECYL
Keypad occupancy indicator. Includes round interior/exterior trims for use with keyed function 51. For 1 3/4" (44.5 mm) thick wood door. Mounting hardware and DM00X-ECYL Cylinder with 2 keys included. Finish: 15, 26D

