



- Certifications**
 - Conforms to ANSI/BHMA A156.2, Grade 2
 - 3 Year limited mechanical warranty
 - 1 Year limited electronic warranty
- Door Thickness**
 - 1 3/8"–2" (35–51 mm)
- Handing**
 - Non handed
- Backset**
 - 2 3/8"–2 3/4" (60–70 mm) adjustable
- Spring Latch**
 - Zinc alloy
 - 1/2" (12.7 mm) throw
- Faceplate**
 - Mortise type, square corners
 - 1 x 2 1/4" (25.4 x 57 mm)
- Strike**
 - T-Type, square corners
 - 1 1/8 x 2 3/4" (28.5 x 70 mm) wood frame
- Chassis**
 - Zinc die-cast levers
 - Lever clutch release
 - Exposed mounting screws
 - Interior / exterior trim gaskets
- Preparation**
 - Cross bore: 2 1/8" (54 mm)
 - Edge bore: 1" (25.4 mm)
- Cylinder**
 - Solid brass, 5-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable

Other keyways and keying options available. May require special order.
- Interface**
 - Digital touch keypad
 - Blue LED back-light

- Electronic Features**
 - 1 Programming code (8 digit)
 - 25 User codes (4–8 digits)
 - 4 Renewable single use codes
 - Auto Lock with delay (99 sec. maximum)
 - Vacation Mode (disables keypad)
 - Optional random screen keypad activation code to prevent number probing
 - Low battery power indicator
- Wireless Protocol**
 - RFID - MIFARE™ 13.56 MHz (Classic 1K)
 - 25 RFID token capacity
 - 2 RFID cards included*
 - Two-factor authentication mode available (requires user code and RFID token)

(* Other single or dual frequency key fobs and bracelets available by special order.
- Power**
 - DC 6V
 - Four (4) AA 1.5V alkaline batteries NOT included.
- Operation Temperature**
 - -31° to 150.8°F (-35° to 66°C)
 - Temperature tolerance can vary due to weather conditions.
- Function**
 - 80 Storeroom
- Lever Style**
 - JN–Juno (default), C–Curved return*, H–Standard return*
 - (* May require additional lead time.
- Finish**
 - 15–Satin nickel, 19–Matte black
 - Other finishes available by special order.

ASM	-	F425T	-	NR	-	2		80		KD		M	-	JN	-	15
TYPE		SERIES		PROTOCOL		KEYWAY		FUNCTION		KEYING		LATCH		LEVER		FINISH

SELECTION GUIDE

SERIES	DESCRIPTION	STYLE ¹	FINISH ²	/ CASE
ASM-F425T-NR	RFID Electronic lever lockset with LED digital touch keypad. 	JN, C, H	15, 19	4

(1) OPTIONAL C, H STYLE LEVERS MAY REQUIRE ADDITIONAL LEAD TIME (2) OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.


OPTIONAL LEVERS



(C) Curved return





(H) Standard return

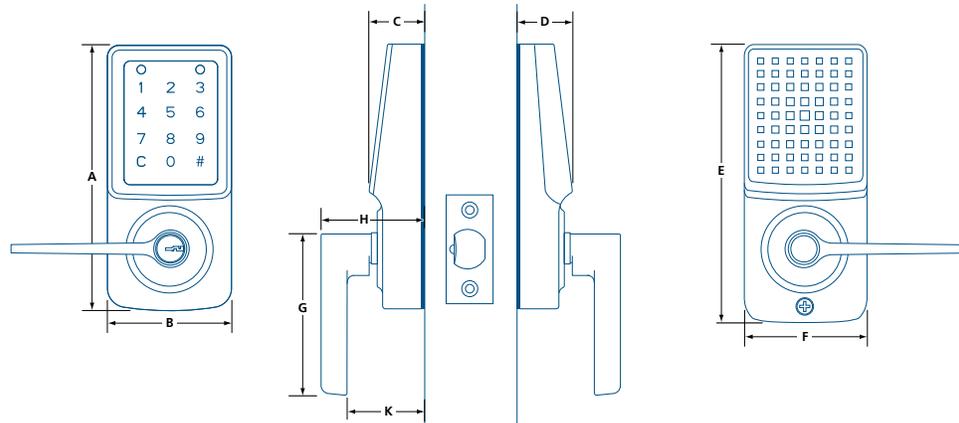

	A	B	C	D	E	F	G	H	K
F425T JN (JUNO)	6 ¹ / ₈ (155)	3 (76)	1 ¹¹ / ₃₂ (34)	1 ¹ / ₄ (32)	6 ¹ / ₈ (155)	2 ²⁹ / ₃₂ (74)	4 ²⁵ / ₃₂ (121.2)	2 ²⁷ / ₃₂ (72.5)	2 (50.8)

IN (MM)



	G	H	K
F425T C	4 ¹¹ / ₁₆ (118.9)	2 ²⁷ / ₃₂ (72.5)	1 ³ / ₃₂ (27.7)
F425T H	4 ³ / ₁₆ (106.2)	2 ²⁷ / ₃₂ (72.5)	1 (25.6)

IN (MM)

PARTS & ACCESSORIES



A-F425-PBC
Replacement battery cover for F425T.



A-F425-PST
Replacement screen trim for F425T.



A-PDMF-BU
Single frequency RFID (13.56MHz),
Classic 1K key fob.

