

DOOR PULLS

GENERAL HARDWARE

DOREX 20T-E SERIES

OFFSET RECTANGULAR D-PULLS, MITERED, 1¼" x ¾" DIAMETER



1 ¼x¾"
32x19mm

APPLICATIONS

- For wood or metal doors 1⅜–2¼" (35–57 mm) thick
- For glass doors ⅝–½" (8–13 mm) thick

FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Matching washers for different finishes included
- Can be installed on 2" (51 mm) aluminum doors and frame with ½" (12.7 mm) door stop
- Packaged in an eco-friendly, fully recyclable, box



630
SATIN STAINLESS
STEEL



19
MATTE BLACK



Single pulls are thru-bolt mounted with round end-caps


SELECTION GUIDE

SERIES	LENGTH [†]	DIMENSION	TYPE	FINISH	DESCRIPTION
20T	24	E	B	630	Offset Rectangular D-Pull, 1¼x¾" (32x19mm) Mitered, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	10, 24, 36 48, 60	E 1-1/4x3/4 (32x19)	B Back-to-Back S Single	630 Satin Stainless Steel 19 Matte black	

IN (MM), (†) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.

DIMENSIONS

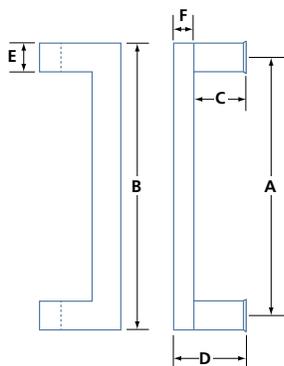

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E GRIP WIDTH	F GRIP HEIGHT
20T10	10 (254)	11¼ (286)	2 ¹¹ / ₁₆ (68)	3 ⁷ / ₁₆ (87)	1¼ (32)	¾ (19)
20T24	24 (609.6)	25¼ (641)	2 ¹¹ / ₁₆ (68)	3 ⁷ / ₁₆ (87)	1¼ (32)	¾ (19)
20T36	36 (914.4)	37¼ (946)	2 ¹¹ / ₁₆ (68)	3 ⁷ / ₁₆ (87)	1¼ (32)	¾ (19)
20T48	48 (1219.2)	49¼ (1251)	2 ¹¹ / ₁₆ (68)	3 ⁷ / ₁₆ (87)	1¼ (32)	¾ (19)
20T60	60 (1524)	61¼ (1556)	2 ¹¹ / ₁₆ (68)	3 ⁷ / ₁₆ (87)	1¼ (32)	¾ (19)

IN (MM)