


MAIL SLOTS

GENERAL HARDWARE


DraftGuard INSULATED MAIL SLOT – DELUXE

46100, 46200



	46100	46200
(A) Front	12 ⁷ / ₃₂ x 3 ⁹ / ₃₂ (310 x 80)	15 ³ / ₄ x 3 ⁹ / ₃₂ (400 x 80)
(B) Slot Size	9 ⁹ / ₃₂ x 1 ³ / ₁₆ (236 x 30)	12 ¹⁹ / ₁₆ x 1 ³ / ₁₆ (325 x 30)
(C) Door cut-out	11 ¹³ / ₁₆ x 2 ³ / ₄ (300 x 70)	15 ¹ / ₁₆ x 2 ³ / ₄ (389 x 70)


IN (MM)

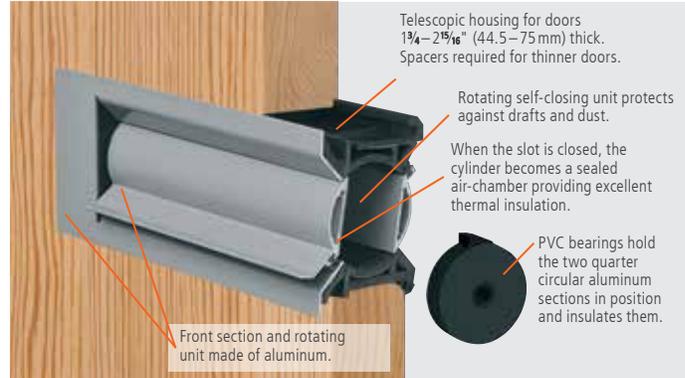

- Fully insulated housing; with rotating self-closing aluminum flaps
- Fully enclosed air chamber stops drafts, dust and reduces noise
- Telescopic housing for doors 1 3/4–2 15/16" (44.5–75 mm) thick
Spacers required for thinner doors (see below)
- Available in wide format to accommodate large envelopes
- Soft rubber weather exterior seal
- Insulating gaskets in all critical areas

FRAME SPACERS

For doors less than 1 3/4 in (44.5 mm) thick.

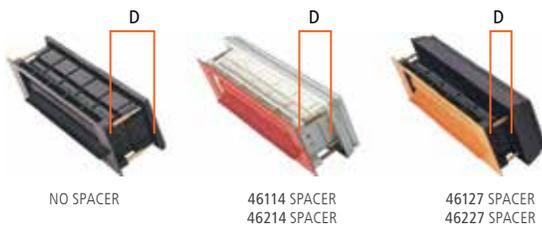

THICKNESS (D)	46100	46200
1 3/4 – 2 15/16 (44.5–75)	—	—
1 3/16 – 2 13/32 (30–61)	#46114BLACK #46114WHITE	#46214BLACK #46214WHITE
2 1/32 – 1 7/8 (17–48)	#46127BLACK #46127WHITE	#46227BLACK #46227WHITE

IN (MM)

-  #461001 Anodized satin silver with black frame and housing
#462001 (wide format)
-  #461004 Anodized medium bronze with black frame and housing
#462004 (wide format)
-  #461005 Anodized dark bronze with black frame and housing
#462005 (wide format)
-  #461006 Anodized brass with black frame and housing
#462006 (wide format)
-  #461007 Powder coated white with white frame and housing
#462007 (wide format)
-  #461010 Powder coated black with black frame and housing
#462010 (wide format)
-  #461011 Anodized satin nickel with black frame and housing
#462011 (wide format)
-  #461012 Matte black with black frame and housing
#462012 (wide format)


(*) OTHER COLOURS / FINISHES AVAILABLE BY SPECIAL ORDER.
PLEASE CONTACT YOUR LOCAL REPRESENTATIVE

MAIL SLOTS

GENERAL HARDWARE

DraftGuard INSULATED MAIL SLOT

46500



	REGULAR	WITH EXTENSION*
(A) Front	11 $\frac{7}{8}$ x 2 $\frac{3}{4}$ (302 x 70)	—
(B) Slot Size	10 x 1 $\frac{1}{2}$ (254 x 38)	—
(C) Door cut-out	11 $\frac{1}{8}$ x 2 (280 x 51)	11 $\frac{1}{4}$ x 2 (286 x 51)

IN (MM) (*) EXTENSION MUST BE USED WITH DOORS OVER 1 $\frac{3}{4}$ IN (44.5 MM) THICK AND SLOT MUST BE CUT WITH FINE-TOOTH SAW.

- Self-closing interior and exterior anodized aluminum flaps
- Fully enclosed tough plastic housing
- Telescopic housing for doors up to 1 $\frac{3}{4}$ " (44.5 mm) thick
- Up to 4 $\frac{1}{4}$ " (108 mm) with extension (sold separately)
- Soft rubber weather exterior seal
- Insulating gaskets in all critical areas



#465001..... Aluminum

#465005..... Dark Bronze

#465006..... Brass

#465007..... White



#465000..... Slot extension.
For doors 1 $\frac{3}{4}$ –4 $\frac{1}{4}$ " (44.5–108 mm)

#465000L..... Screw pack for slot extension

#465000R..... Replacement screws for mail slot

