


DOOR SWEEPS

GENERAL HARDWARE

DOREX DOOR SWEEP WITH NYLON BRUSH

DGS-WAD

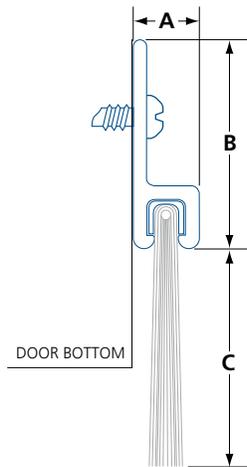


- cULus listed (UL10C)
 - » Wood fire door: 20 min
 - » Composite fire door: 90 min
 - » Metal fire door: 3 hrs
- Surface mounted
- Reduces infiltration of drafts, moisture, air, insects, and dust
- Extruded aluminum profile
- Flexible nylon brush conforms to surface irregularities
- Remains flexible between -40 to 205°C (-40 to 401°F)
- Can be cut to required length
- Includes screws for wood and metal doors

MODEL	FINISH	A	B	C	LENGTH
DGS-WAD380B-36	Mill Aluminum	1/4 (6.4)	7/8 (22.2)	1 (25.4)	36 (914)
DGS-WAD380B-48					48 (1219)
DGS-WDD380B-36	Dark Bronze	(6.4)	(22.2)	(25.4)	36 (914)
DGS-WDD380B-48					48 (1219)

IN(MM)

DOREX DOOR SWEEP WITH NYLON BRUSH AND RAIN DRIP

DGS-WAR

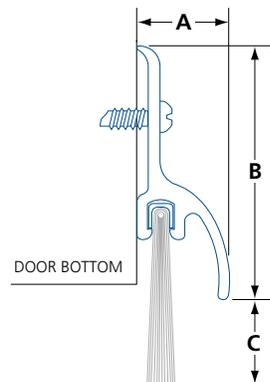

- cULus listed (UL10C)
 - » Wood fire door: 20 min
 - » Composite fire door: 90 min
 - » Metal fire door: 3 hrs
- Surface mounted
- Reduces infiltration of drafts, moisture, air, insects, and dust
- Rain drip deflects water and prevents seepage through the gap under doors
- Extruded aluminum profile
- Flexible nylon brush conforms to surface irregularities
- Remains flexible between -40 to 205°C (-40 to 401°F)
- Can be cut to required length
- Includes screws for wood and metal doors

MODEL	FINISH	A	B	C	LENGTH
DGS-WAR480B-36	Mill Aluminum	1/2 (12.7)	1 1/4 (31.8)	3/8 (9.5)	36 (914)

IN(MM)