


DOOR SWEEPS

GENERAL HARDWARE

DOREX DOOR SWEEP WITH NEOPRENE SEAL

DGS-WA210, WD210

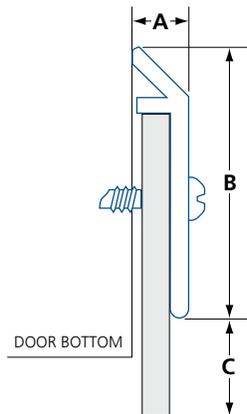

- cULus listed (UL10C)
 - » Metal fire door: 3 hrs
- Surface mounted
- Reduces infiltration of drafts, moisture, air, insects, and dust
- Extruded aluminum profile
- Neoprene blade
- Remains flexible between -20 to 50°C (-4 to 122°F)
- Can be cut to required length
- Includes screws for metal doors

| MODEL | FINISH | A | B | C | LENGTH |
|---------------|---------------|---------------|-----------------|----------------|-----------|
| DGS-WA210N-36 | Mill Aluminum | 1/4 (6.34) | 1 1/4 (31.8) | 9/16 (14.3) | 36 (914) |
| DGS-WA210N-48 | | | | | 48 (1219) |
| DGS-WD210N-36 | Dark Bronze | 1/4 (6.34) | 1 1/4 (31.8) | 9/16 (14.3) | 36 (914) |
| DGS-WD210N-48 | | | | | 48 (1219) |

IN(MM)

