

PERIMETER GASKETS


GENERAL HARDWARE

DOREX PERIMETER GASKETING


DGS-SA14V



- cULus listed (UL10C)
 - » Wood fire door: 20 min
 - » Composite fire door: 90 min
 - » Metal fire door: 3 hrs

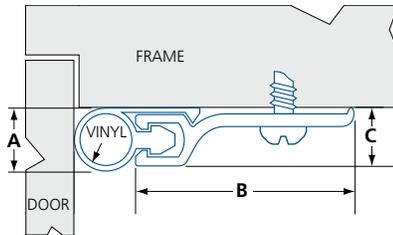

- Surface mounted
- For use on a wood or metal door frame of a 3x7ft (91.4x213.4cm) door
- For gaps between 1/16–1/4" (2–6 mm)
- Temperature range: -35 to 120°C (-31 to 248°F)
- Extruded aluminum profile
- Vinyl gasket, provides an excellent general-purpose seal
- Can be installed on the face of a door to fill gaps between paired doors
- Slotted holes for easy adjustment
- Can be cut to required length
- Includes screws for wood and metal door frames
- Supplied in 3 pieces: 2x7 ft (213.4 cm), 1x3 ft (91.4 cm)



| MODEL | FINISH | A ¹ | B | C | LENGTH |
|--------------|---------------|----------------|---------------|--------------|---------------|
| DGS-SA14V-17 | Mill Aluminum | 1/4 (6.4) | 7/8 (22.2) | 1/4 (6.4) | 204 (5080) |


IN(MM) (1) NON-COMPRESSED

DOREX ADHESIVE GASKETING


DGS-SB12S



- cULus listed (UL10C)
 - » Wood fire door: 20 min
 - » Composite fire door: 90 min
 - » Metal fire door: 3 hrs



- Silicone gasket with permanent adhesive strip
- Surface mounted
- For use on wood or metal door frames
- Compresses to fill gaps between 1/16–1/4" (2–6 mm)
- Provides an excellent general-purpose seal
- Extruded high-temperature silicone, self-extinguishing and non-toxic
- Effective between -50 to 232°C (-58 to 450°F)
- Impervious to fungus, mold, and mildew
- Unaffected by sunlight, ozone, and ultraviolet rays
- Coil length of 17ft (50.8cm) is sufficient for a door frame for a 3x7ft (91.4x213.4cm) door
- Can be cut to required length
- Other lengths available by special order



| MODEL | FINISH | A ¹ | B | LENGTH ² |
|--------------|--------|----------------|---------------|---------------------|
| DGS-SB12S-17 | Black | 1/4 (6.4) | 1/2 (12.7) | 204 (5080) |

IN(MM) (1) NON-COMPRESSED (2) COIL LENGTH

