



# Grade 1 & Grade 2 Deadbolt Single & Double Cylinder IC Supplemental Instruction

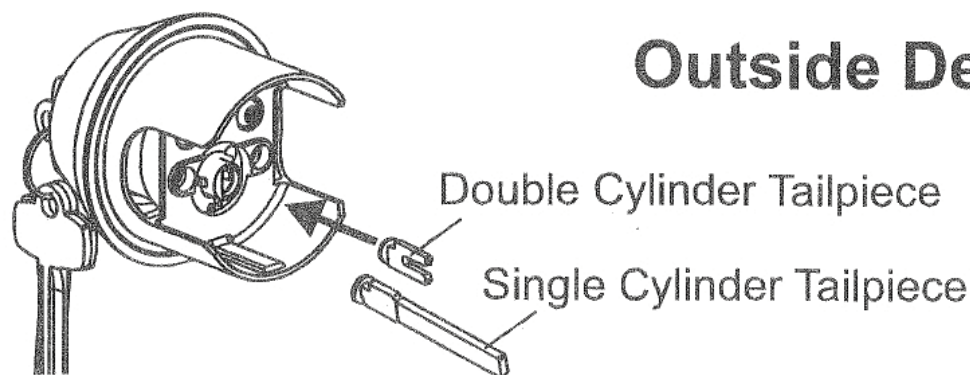


## Outside Deadbolt

Single Cylinder


Double Cylinder

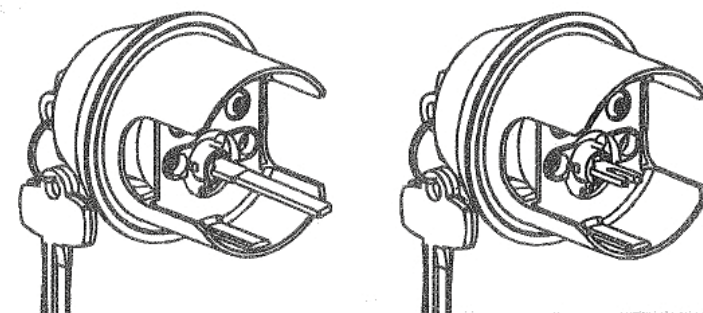

Load the tailpiece in the vertical direction and turn 90 degrees to horizontal position.

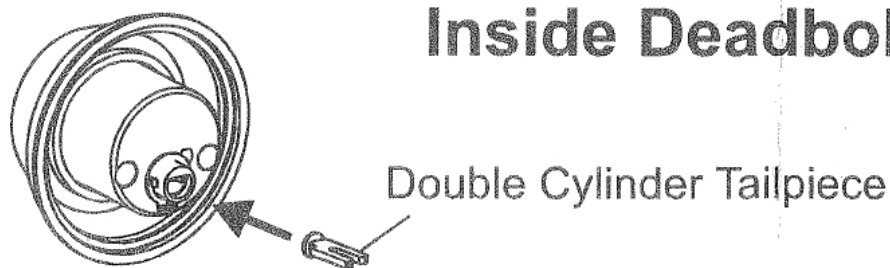


## Inside Deadbolt

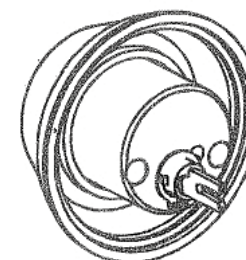

Load the tailpiece in the horizontal direction and turn 90 degrees to vertical position.

# Serrure à pêne dormant Grade 1 et Grade 2, cylindre simple ou double



## Instructions supplémentaires pour cylindre à noyau interchangeable

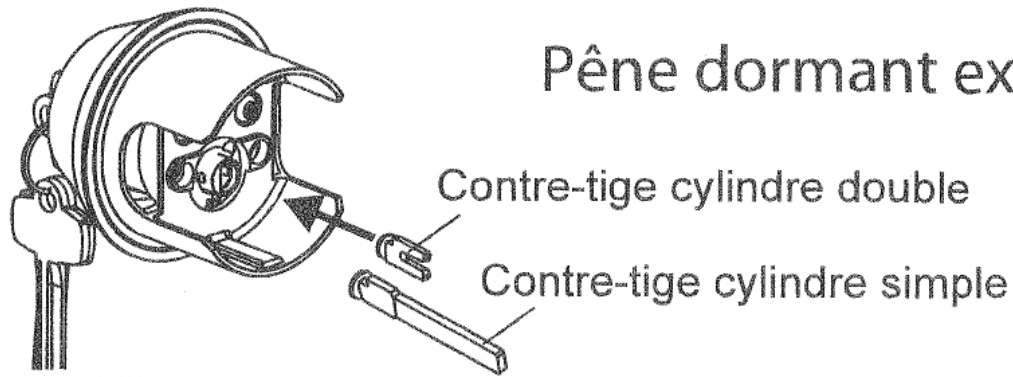


### Pêne dormant extérieur

Cylindre simple

Cylindre double




Enclencher la contre-tige en position verticale et tourner 90 degrés à la position horizontale.

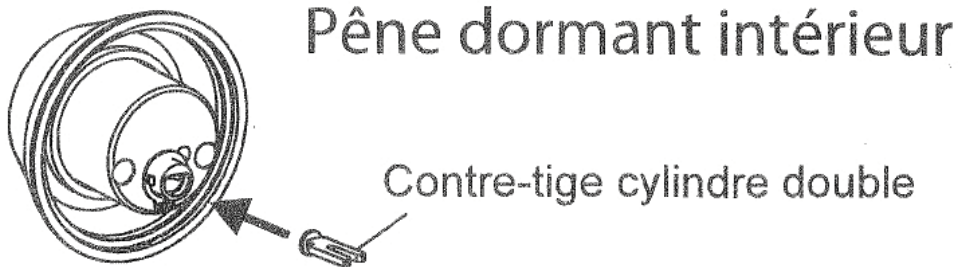

### Pêne dormant intérieur

Contre-tige cylindre double

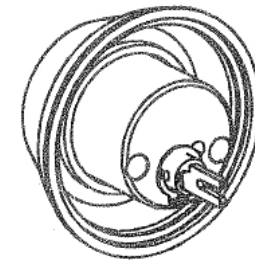

Enclencher la contre-tige en position horizontale et tourner 90 degrés à la position verticale.