


# FLUSH BOLTS

## GENERAL HARDWARE

### MANUAL EXTENSION FLUSH BOLT – FIRE RATED

FBUL100

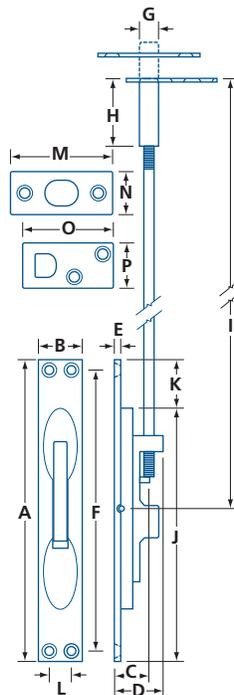

- cULus listed for use with hollow metal, metal clad, steel covered composite, flush type sheet or metal swinging type fire doors.
- Not for wood fire doors
- Fits metal door preparation per ANSI A115.4-206
- Brass and steel components
- Throw:  $\frac{3}{4}$ " (19mm)
- Adjustable rod up to  $\frac{7}{8}$ " (22.2 mm)
- Supplied with guide, strike plate and 12" (305 mm)  $\frac{1}{4}$ -20 UNC threaded rod (see dimension "I")
- Mounting hardware included: combination machine-wood screws
- Optional rods available (not pictured):  
 #FBUL100R16 18" (457.2 mm) optional threaded rod  
 #FBUL100R22 24" (609.6 mm) optional threaded rod

MODEL	FINISH	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
FBUL100	15, 26D 19	$6\frac{3}{4}$ (171)	1 (25.4)	$\frac{3}{4}$ (19.1)	1 (25.4)	$\frac{1}{8}$ (3.2)	$6\frac{1}{4}$ (158.8)	$\frac{1}{2}$ (12.7)	$1\frac{1}{2}$ (38.1)	12 (305)	$4\frac{3}{4}$ (120)	1 (25.4)	$\frac{1}{2}$ (12.7)	$2\frac{1}{4}$ (57)	$1\frac{5}{16}$ (23.8)	2 (50.8)	1 (25.4)

IN (MM)