

# 2295 SERIES

## NARROW STILE EXIT DEVICE



- Certifications**
- UL listed, Panic Exit
  - 1 Year limited warranty

- Rail Assembly**
- High strength aluminum
  - Field sizable

- Handing**
- Non-handed

- Door Width**
- 30–38" (762–965 mm)
  - 36–44" (914–1118 mm) –option

- Door Thickness**
- 1 3/4" (45.5 mm)

*Recommended for aluminum doors*

- Stile Width**
- 1 3/4" (44.5 mm) minimum

*Measured from door edge*

- Projection**
- 2 1/16" (67 mm) from door surface

- Latchbolt**
- Stainless steel, 5/8" (15,9 mm)

- Strike**
- Steel, roller strike #2295S

- Dogging**
- Hex key dogging

- Hardware**
- Machine screws

- Trims**
- Escutcheon trim – available

*Sold separately, see 2295TE*

- Finish**
- 20D–Dark bronze; 28–Aluminum


*Other finishes available by special order*

2295PR	3	–	28
MODEL	SIZE		FINISH

## SELECTION GUIDE

MODEL	SIZE	DOOR WIDTH <sup>1</sup>	DOGGING	FINISH	/CASE	
2295PR	Panic Exit Hardware Rim Device	3	30-38 (762-965)	●	20D, 28	4
		4	36-44 (914-1118)			

(1) RECOMMENDED DOOR WIDTH, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT.

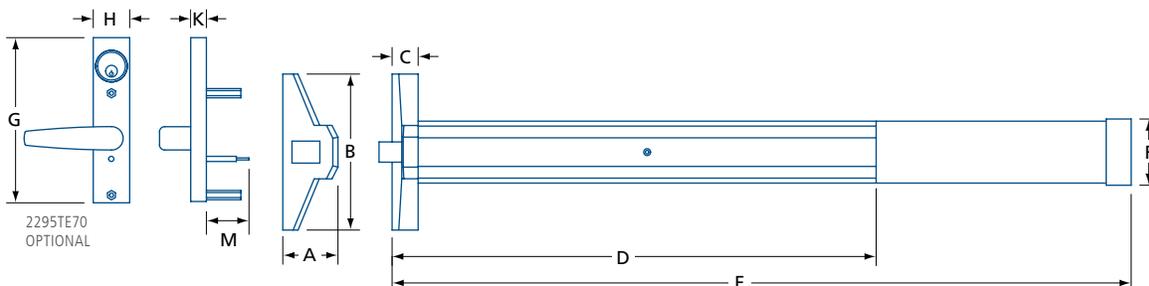

MODEL	A	B	C	D	E <sup>1</sup>	F	G	H	K	M
2295PR3	2 11/16 (67)	7 1/2 (191)	1 1/4 (32)	23 1/4 (591)	35 1/2 (902)	3 3/16 (81)	7 15/16 (201.6)	1 3/4 (44)	3/4 (19)	2 1/16 (52)
2295PR4					41 1/2 (1054)					

IN (MM) (1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

## 2295TE ESCUTCHEON TRIM



Trim	2295TE70
Function	Entrance/Classroom
Finish	20D-Dark bronze, 28-Aluminum
Lever	Straight, no return
Cylinder <sup>1</sup>	1 1/4 (32) mortise
Door Thickness	1 3/4 (44.5)
Warranty	1 Year limited

IN (MM) (1) SOLID BRASS, 6-PIN CYLINDER, SCHLAGE "C", 2 KEYS INCLUDED - KEYING SERVICES AVAILABLE

## PARTS & COMPONENTS



**2295S**  
Standard roller strike.



**2295AD**  
Dogging mechanism.

