

1400 SERIES

NARROW STILE EXIT DEVICE



- Certifications**
- cUL listed, Panic Exit
 - 1 Year limited warranty

- Rail Assembly**
- High strength aluminum extrusion
 - Field sizable

- Handing**
- 1400PR: Handed (field reversible)
 - 1400PV: Non handed

- Door Size**
- 30-36x84" (762-914x2134 mm)
 - 36-42x84" (914-1067x2134 mm) – option

- Door Thickness**
- 1¾" (45 mm)
 - 2" (51 mm) and 2¼" (57 mm) – available*
- Recommended for aluminum doors (*) Rim model only.*

- Stile Width**
- 1¾" (44.5 mm) minimum
- Measured from door edge*

- Projection**
- 2¾" (70 mm) from door surface

- Lock Case**
- Heavy duty steel deadlatch mortise lock
 - Adjustable mounting posts
 - 1½" (28.6 mm) backset
 - Anodized aluminum flat faceplate

- Cylinder**
- Not included, sold separately

- Latchbolts**
- 1400PR: Stainless steel deadlatch
 - 1400PV: Stainless steel top & bottom latches

- Vertical Rods**
- For 84" (2134 mm) door
- 1400PV36 concealed vertical rod model only*

- Dogging**
- Hex key dogging

- Hardware**
- Machine screws

- Finish**
- AL–Aluminum; DU–Dark bronze; MB–Matte black
- Other finishes available by special order*


1400PR	36	LHR	-	AL
MODEL ¹	SIZE ¹	HAND ²		FINISH

(1) SEE SELECTION GUIDE (2) FOR 1400PR INDICATE: LHR–LEFT HAND REVERSED, RHR – RIGHT HAND REVERSED; OMIT FOR 1400PV

SELECTION GUIDE

MODEL		SIZE	DOOR SIZE ¹	DOGGING	FINISH	/CASE
1400PR	Panic Exit Hardware Mortise Rim. Indicate required handing.	36	30-36x84 (762-914x2134)	•	AL, DU, MB	6
		42	36-42x84 (914-1067x2134)	•	AL, DU, MB	6
1400PV	Panic Exit Hardware Concealed Vertical Rod. Non-handed.	36	30-36x84 (762-914x2134)	•	AL, DU	6

(1) RECOMMENDED DOOR SIZE, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT.

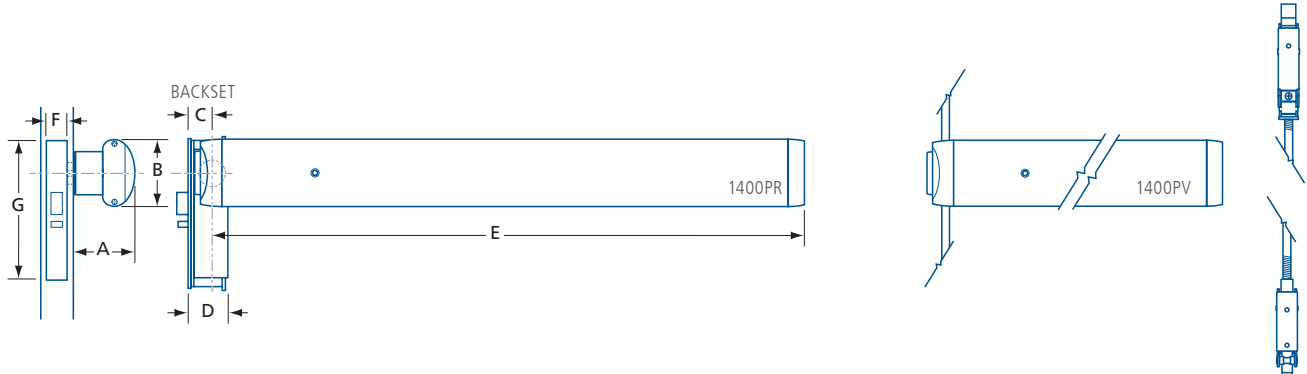

MODEL	A	B	C	D	E ¹	F	G
1400PR/PV 36	2 ³ / ₄ (70)	3 ¹ / ₁₆ (78)	1 ¹ / ₈ (28.6)	1 ³ / ₄ (44.5)	33 ⁷ / ₈ (860)	1 (25.4)	6 ³ / ₄ (171)
1400PR 42					39 ⁷ / ₈ (1013)		

IN(MM) (1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

PARTS & ACCESSORIES



CBM118A
Mortise cylinder, 1¹/₈" (28.6mm) long,
with cam A.



CMCAMA
Adams Rite-type cam.



1400ARCAM
1400AR exit device cam.



1400KVE
Mortise cylinder escutcheon mount.
Aluminum (-AL) or Dark bronze (-DU) finish.



1400KRDT200
Extension kit for 2" (51 mm) thick doors.
Includes ⁹/₃₂" (4 mm) spindle extension. For
1400PR only.

1400KRDT225
Extension kit for 2¹/₄" (57 mm) thick doors.
Includes ¹/₄" (6 mm) spindle extension. For
1400PR only.

