

2295 SERIES

NARROW STILE EXIT DEVICE



- Certifications**
- UL listed, Panic Exit
 - 1 Year limited warranty

- Rail Assembly**
- High strength aluminum
 - Field sizable

- Handing**
- Non-handed

- Door Width**
- 30–36" (762–914 mm)

- Door Thickness**
- 1 3/4" (45.5 mm)
- Recommended for aluminum doors*

- Stile Width**
- 1 3/4" (44.5 mm) minimum
- Measured from door edge*

- Projection**
- 2 1/16" (67 mm) from door surface

- Latchbolt**
- Stainless steel

- Strike**
- Steel, roller strike #2295S

- Dogging**
- Hex key dogging

- Hardware**
- Machine screws

- Trims**
- Escutcheon trim – available
- Sold separately, see 2295TE*


- Finish**
- 20D–Duranodic; 28–Aluminum
- Other finishes available by special order*

2295PR	3	–	28
MODEL	SIZE		FINISH

SELECTION GUIDE

MODEL		SIZE	DOOR WIDTH ¹	DOGGING	FINISH	/CASE
2295PR	Panic Exit Hardware Rim Device	3	30-36 (762-914)	•	20D, 28	4

(1) RECOMMENDED DOOR WIDTH, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT.

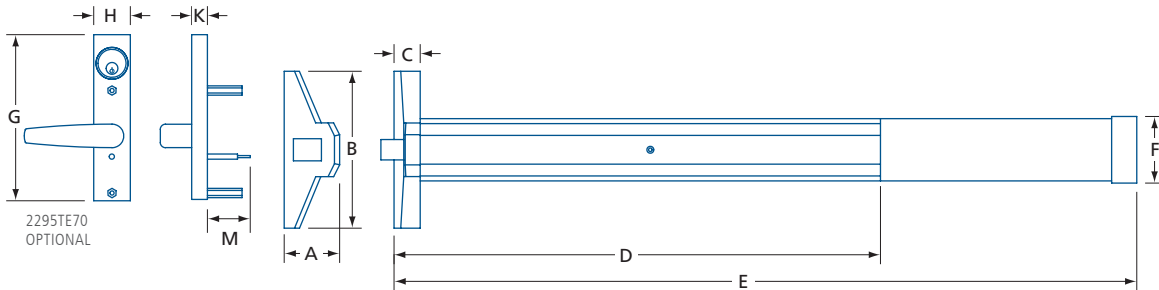

MODEL	A	B	C	D	E ¹	F	G	H	K	M
2295PR3	2 11/16 (67)	7 1/2 (191)	1 1/4 (32)	23 1/4 (591)	35 5/16 (902)	3 3/16 (81)	7 15/16 (201.6)	1 3/8 (44)	3/4 (19)	2 1/16 (52)

IN (MM) (1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

2295TE ESCUTCHEON TRIM




Trim	2295TE70
Function	Entrance/Classroom
Finish	20D-Duranodic, 28-Aluminum
Lever	Straight, no return
Cylinder ¹	1 1/4 (32) mortise
Door Thickness	1 3/4 (44.5)
Warranty	1 Year limited

IN (MM) (1) SOLID BRASS, 6-PIN CYLINDER, SCHLAGE "C", 2 KEYS INCLUDED - KEYING SERVICES AVAILABLE

PARTS & COMPONENTS



2295S
Standard roller strike.



2295AD
Dogging mechanism.

