


---

# Glass Door Hardware Guide

---



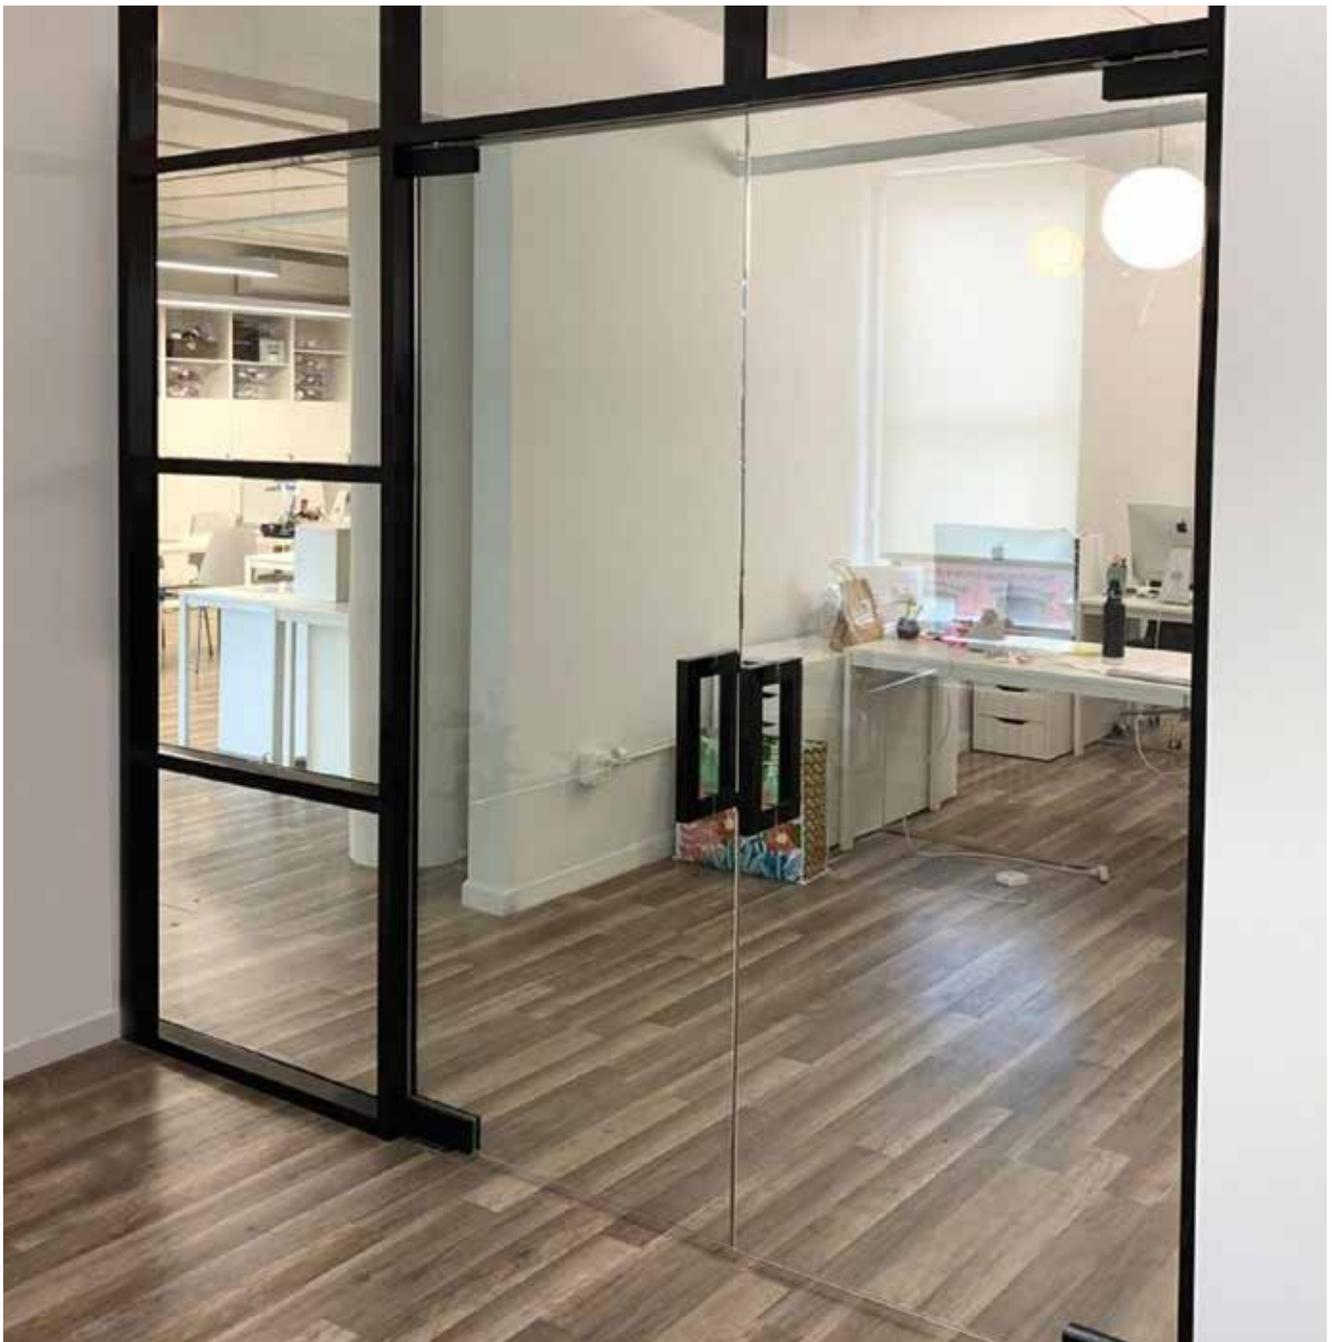

## The Door Hardware Professionals

Canaropa is a leading contract manufacturer, importer and distributor of quality commercial, residential and architectural door hardware. The reliable choice of professionals, developers and architects – our products are found throughout North America in private homes, residential developments, offices, commercial and industrial buildings and resorts.

Since 1954, Canaropa has been offering an extensive selection of reliable, quality door hardware, including door closers, locks, hinges, exit devices, security hardware and more. Coupled with regional offices, warehouses, and large inventory, we provide fast and reliable service to our customers from coast to coast.

Canaropa is focused on delivering the best possible service to its customers. With our dedicated team of experienced door hardware professionals, management and sales teams – we work hard to meet the needs of our customers by developing new products, delivering consulting services and staying current with trends in the market.

## Professional & Technical Services

Whether it's a small residential project or a large multi-building development — Canaropa's hardware professionals can support you from the design stage all the way through to final construction.

Canaropa offers a variety of complimentary professional consulting and technical services to architects, designers and developers for commercial, residential, industrial, institutional, or hybrid projects:

### PROFESSIONAL SERVICES

- Door hardware specification writing, review and conversion.
- Architectural hardware consultation.
- Budget preparation.
- Review substitution requests.

### TECHNICAL SERVICES

- Technical project support and troubleshooting.
- Development and planning of common and high-security keying systems.
- In-house keying services – including high-security cylinders.
- Engraving services.

Our experienced hardware professionals are happy to help. They are well versed on local and national building codes, the unique needs of various types of facilities and egress requirements.

Take advantage of our experience and product knowledge today.

[www.canaropa.com](http://www.canaropa.com)



# GLASS DOOR HARDWARE GUIDE TABLE OF CONTENTS

## DOOR CLOSERS

Complete Glass Door Closer Kit .....	4
PF100DC Series Patch fitting closer .....	5
PF102DC Series Patch fitting closer .....	6
DOREX 30 Series Concealed overhead door closer .....	7
DOREX 40 Series Concealed floor door closer .....	8

## PATCH FITTINGS

PF120, PF121, PF150 Top door patch.....	9
PF110 Bottom door patch.....	9
PF140 Transom corner patch.....	10
PF160 Transom corner stop patch .....	10
PF165 Transom connector / door stop.....	10
PF130, PF131 Wall mount transom patch with pivot .....	11
PF163, PF164 Wall mount transom patch with stop .....	11
Parts & accessories .....	11

## GLASS DOOR LOCKS

PF210, PF251 Patch locks.....	13
PF251P Patch locks .....	14
PF200 Lock strike.....	14
PF181, PF180 Floor deadbolt.....	15
Parts & accessories .....	16

## DOOR PULLS

Ladder Pulls .....	18
Straight Mitered Pulls.....	22
Offset Pulls .....	25
Door or Millwork/Cabinet .....	27

## FLOOR STOPS

Floor Stops.....	30
------------------	----

## ABBREVIATIONS

DIA, ø	Diameter
KG	Kilograms
LBS	Pounds
BS	Backset
LH	Left hand
LHR	Left hand reversed
MAX	Maximum
MIN	Minimum
N/A, —	Not applicable / Not available
QTY	Quantity (usually followed by notes)
RH	Right hand
RHR	Right hand reversed
SQ, ▣	Square
WT	Weight
/UNIT	Number of items per basic unit of sale (bagged or boxed)
/BOX, /BAG	Number of UNITS found in an inner carton or bag
/CASE	Number of BOXES or UNITS found in an outer (shipping) carton

# Complete Glass Door Closer Kit



- Includes all parts required for a single glass door\*
- For interior use in low to moderate traffic applications
- For tempered glass panels  $\frac{5}{16}$  –  $\frac{1}{2}$ " (8-12 mm) thick

## Includes:



### Top Frame Pivot (PF120TP)

- Solid steel
- Surface mounted




### Top Door Patch Fitting Pivot (PF121)

- Machined aluminum body
- Metal covers
- See page 9



### Hydraulic Patch Fitting Door Closer (PF100DC)

- Concealed in patch fitting
- Single or double acting
- +/- 150° maximum opening
- Adjustable closing and latching speed
- Floor surface mounted
- Pinned metal covers
- Available with 90° hold open, PF100DCHO See page 5

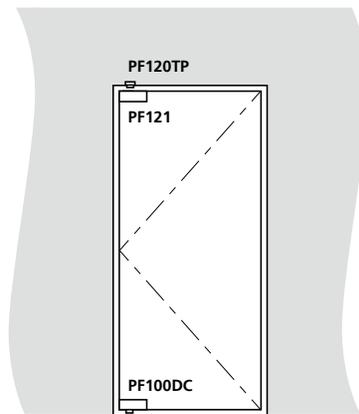

## To order:



### Clear Anodized Aluminum

PF100DC-SD3-628 (No hold open)  
PF100DCHO-SD3-628 (90° hold open)



### Polished Stainless Steel

PF100DCHO-SD3-629 (90° hold open)



### Satin Stainless Steel

PF100DC-SD3-630 (No hold open)  
PF100DCHO-SD3-630 (90° hold open)



### Matte Black Coated Steel

PF100DC-SD3-19 (No hold open)  
PF100DCHO-SD3-19 (90° hold open)




\* Door pull or lock not included

## PF100DC / PF100DCHO HYDRAULIC PATCH FITING CLOSER



- 1-Year limited warranty
- Medium duty hydraulic closer
- For frameless tempered glass doors  $\frac{5}{16}$ – $\frac{1}{2}$ " (8–12.7 mm) thick
- Non-handed
- Single or double acting,  $\pm 150^\circ$  maximum opening
- Adjustable closing and latching speeds
- Integrated door adjustment
- Optional  $90^\circ$  hold open (#PF100DCHO)
- Pinned metal covers
- Floor surface mounted
- Maximum door width: 39" (1000 mm)
- Maximum door weight: 220 lbs (100 kg)
- Maximum door height
  - $\frac{5}{16}$ " (8 mm) glass: 84" (2134 mm)
  - $\frac{1}{2}$ " (12.7 mm) glass: 108" (2743 mm)
- Easy access for vertical, horizontal door adjustments ( $\pm \frac{1}{8}$ " - 3 mm)
- Easy access for clockwise and counter clockwise angular door adjustment ( $\pm 4^\circ$ )

PF100DC	–	630
MODEL		FINISH

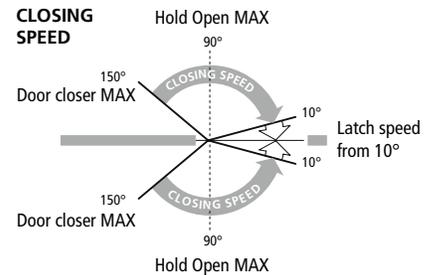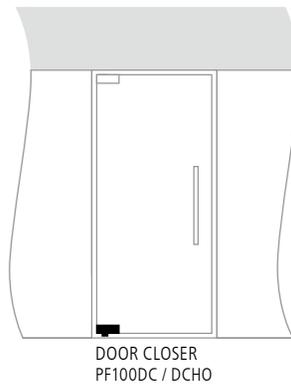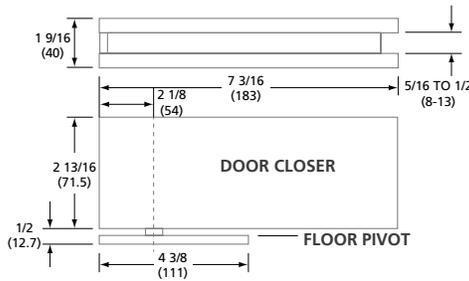

For different door configuration and product assembly, please consult configuration guide




# DOOR CLOSERS

## FPF102DC / PF102DCHO HYDRAULIC PATCH FITING CLOSER



- 1-Year limited warranty
- Medium duty hydraulic closer
- For frameless tempered glass doors  $\frac{5}{16}$ – $\frac{1}{2}$ " (8–12.7 mm) thick
- Non-handed
- Single or double acting,  $\pm 170^\circ$  maximum opening
- Adjustable closing and latching speeds
- Integrated door adjustment
- Optional  $90^\circ$  hold open (#PF102DCHO)
- Snap-on metal covers
- Floor surface mounted
- Maximum door width: 39" (1000mm)
- Maximum door weight: 220lbs (100kg)
- Maximum door height
  - $\frac{5}{16}$ " (8 mm) glass: 84" (2134 mm)
  - $\frac{1}{2}$ " (13 mm) glass: 108" (2743 mm)
- Vertical and horizontal adjustments ( $\pm 1$  mm)
- Clockwise and counter clockwise adjustment ( $\pm 2^\circ$ )


PF102DC	–	630
MODEL		FINISH

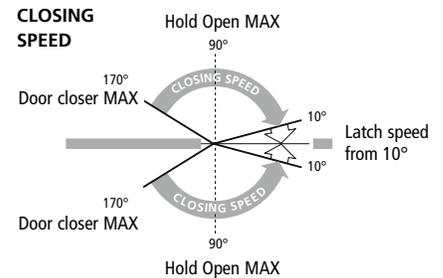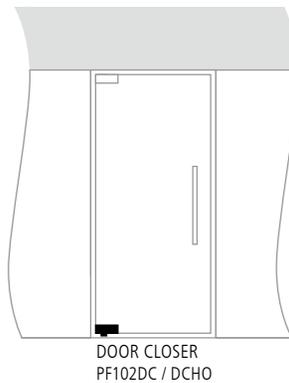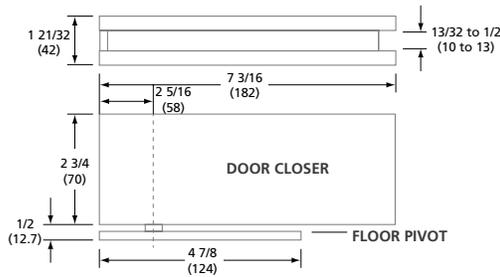

For different door configuration and product assembly, please consult configuration guide

\* Non stock item (may require special order)

## DOREX 30 SERIES CONCEALED OVERHEAD DOOR CLOSER FOR MODERATE TRAFFIC APPLICATIONS



- EN1154 compliant for 500,000 test cycles
  - 5-Year limited warranty
  - For single acting, double acting or centre-hung applications
  - For for wood, metal or aluminum frame doors over 1 3/4" (44.5mm) thick
  - Compatible / interchangeable with Jackson-type door closers
  - Compact steel body fits 1 3/4 x 4" (44.5 x 101.6mm) header sections
  - Adjustable sweep and latching speeds
  - Mounting hardware included
  - Mechanical hold open available
- **30 MODEL**
    - 1/2" (12.7 mm) spindle
    - Includes side loading arm (#3010S) and adjustable floor mounted pivot set (#3020DP)
  - **31 MODEL**
    - 1 1/16" (17 mm) spindle
    - Includes end loading arm (#3010EL) and adjustable floor mounted pivot set (#3020DP)
  - **31B MODEL**
    - Body only model, 1 1/16" (17 mm) spindle
    - Recommended for frame-less tempered glass doors with appropriate glass patch fittings (sold separately - PF150) See page 9

30	RD	90	HO
MODEL	DUTY	OPENING	OPTION

HO-HOLD OPEN; NHO-NO HOLD OPEN

MODEL	DESCRIPTION	MAXIMUM OPENING	OPTION <sup>1</sup>	WEIGHT CAPACITY <sup>2</sup>	MAXIMUM DOOR SIZE <sup>3</sup>	CLOSING FORCE Nm <sup>4</sup>
30LD 90	Light duty, bottom pivot, and side loading arm assembly.	90°	NHO	225 (100)	30 x 96 (732 x 2438)	13-18
30LD 105		105°				
30RD 90	Regular duty, bottom pivot, and side loading arm assembly.	90°	NHO, HO	225 (100)	42 x 96 (1067 x 2438)	18-26
30RD 105		105°				
31RD 90	Regular duty, 17 mm spindle, bottom pivot, and end loading arm assembly. Available body-only (31B)*	90°	NHO, HO	225 (100)	42 x 96 (1067 x 2438)	18-26
31RD 105		105°				
30HD 90	Heavy duty, bottom pivot, and side loading arm assembly.	90°	NHO, HO	225 (100)	48 x 96 (1219 x 2438)	26-37
30HD 105		105°				
31HD 105	Heavy duty, 17 mm spindle, bottom pivot, and end loading arm assembly.	105°	NHO			

(1) NHO-NO HOLD OPEN; HO-HOLD OPEN (2) MAXIMUM DOOR WEIGHT IN POUNDS (KILOGRAMS). (3) MAXIMUM DOOR SIZE W X H IN INCHES (MILLIMETRES). (4) NOMINAL VALUES PROVIDED; MAY VARY WITH INSTALLATION. (\*) 31B BODY ONLY MODEL RECOMMENDED FOR FRAME-LESS TEMPERED GLASS DOOR APPLICATIONS. ARM, PIVOT, ANCHORS & MOUNTING HARDWARE NOT INCLUDED.

## PARTS & ACCESSORIES



3010S  
Type S,  
Side Loading Arm



3010EL  
Type A,  
End Loading Arm



3010OC  
Offset Arm and Channel



3010DP  
Bottom Pivot Set,  
18-20mm




3020DP  
Bottom Pivot Set,  
18-57mm



3010AMC  
Anchor Kit

# DOOR CLOSERS

## DOREX 40 SERIES CONCEALED FLOOR DOOR CLOSER FOR MODERATE TRAFFIC APPLICATIONS



- 5-Year limited warranty
- For single acting, double acting or centre-hung applications
- For wood, metal or aluminum frame doors over 1 3/4" (44.5 mm) thick
- Compatible / interchangeable with Jackson-type door closers
- Compact steel body fits thin slab floors; 1 5/8" (41.3 mm) deep
- 1 9/32" (15 mm) spindle
- Heavy duty arm and top pivot included
- Adjustable sweep and latching speeds
- Cover plate included (#40CPC32D)
- Cement housing and mounting hardware included
- Mechanical hold open available

### 40B MODEL

- Body only model
- Includes 1 9/32" (15 mm) removable spindle (#40ESP-3); others available
- Recommended for frame-less tempered glass doors with appropriate glass patch fittings (sold separately - PF110)

40B	RD	90	HO	-	RS
MODEL	DUTY	OPENING	OPTION	OPTION	OPTION

HO-HOLD OPEN; NHO-NO HOLD OPEN; RS-REMOVABLE SPINDLE

MODEL	DESCRIPTION	MAXIMUM OPENING	OPTION <sup>1</sup>	WEIGHT CAPACITY <sup>2</sup>	MAXIMUM DOOR SIZE <sup>3</sup>	CLOSING FORCE Nm <sup>4</sup>
40 RD 90	Regular duty, with bottom arm and top pivot assembly. Stainless steel cover included.	90°	HO	225 (100)	36 x 96 (914 x 2438)	18-26
40 RD 105		105°				
40 RD 130		130°	NHO			
40B RD90 -RS	Regular duty, body only, with removable 15 mm pivot with 3 mm extension.*	90°	HO	225 (100)	36 x 96 (914 x 2438)	18-26
40B RD130 -RS		130°	NHO			
40 HD 90	Heavy duty, with bottom arm and top pivot assembly. Stainless steel cover included.	90°	HO	225 (100)	42 x 96 (1067 x 2438)	26-37
40 HD 105		105°	HO			
40 HD 130		130°	NHO			

(1) NHO-NO HOLD OPEN; HO-HOLD OPEN (2) MAXIMUM DOOR WEIGHT IN POUNDS (KILOGRAMS). (3) MAXIMUM DOOR SIZE W X H IN INCHES (MILLIMETRES).

(4) NOMINAL VALUES PROVIDED; MAY VARY WITH INSTALLATION.

(\*) RECOMMENDED FOR FRAME-LESS TEMPERED GLASS DOOR APPLICATIONS. CEMENT CASE, COVER & MOUNTING HARDWARE NOT INCLUDED. OTHER PIVOTS SOLD SEPARATELY.

## PARTS & ACCESSORIES



**40CPC32D**  
Cover plate;  
satin stainless steel

**40CPC3**  
Cover plate;  
polished brass



**40ESP-3**  
Removable 15 mm pivot,  
3 mm extension.  
Included with #40B.



**40ESP-5**  
Removable 15 mm pivot,  
5 mm extension. For  
use with #40B model.



**40ESP-10**  
Removable 15 mm pivot,  
10 mm extension. For  
use with #40B model.



**40ESP-15**  
Removable 15 mm pivot,  
15 mm extension. For  
use with #40B model.

## TOP & BOTTOM PATCH FITTINGS



PF120-630


### TOP DOOR PATCH FITTING

#### PF120


- 1 year limited warranty, 220lbs (100kg) capacity
- Regular model recommended for use with #PF140 or #PF130 patch

#### PF121

- Extended model recommended for use with #PF100DC/DCHO door closer



PF120	-	630
MODEL		FINISH




PF150-630


### TOP DOOR PATCH FITTING

#### PF150

- 1 year limited warranty, 220lbs (100kg) capacity
- For use with DOREX 30 SERIES concealed overhead door closer, see page 6



PF150	-	630
MODEL		FINISH




PF110-630


### BOTTOM DOOR PATCH FITTING

#### PF110

- 1 year limited warranty, 220lbs (100kg) capacity
- Can be used with bottom door pivot (#PF110BP1) or with DOREX 40 SERIES concealed floor closer, See page 7



PF110	-	630
MODEL		FINISH



# GLASS DOOR PATCH FITTINGS

## TRANSOMS




PF140-630


### TRANSOM CORNER PATCH FITTING

#### PF140

- 1 year limited warranty, 220lbs (100kg) capacity
- For use with glass transom & sidelight
- Recommended top patch fitting: #PF120



PF140	-	630
MODEL		FINISH




PF160-630


### TRANSOM CORNER PATCH FITTING WITH STOP

#### PF160

- 1 year limited warranty, 220lbs (100kg) capacity
- For use with glass transom & sidelight
- For single glass door applications



PF160	-	630
MODEL		FINISH



PF165-630


### TRANSOM CONNECTOR WITH DOOR STOP

#### PF165

- 1 year limited warranty, 220lbs (100kg) capacity
- For use with glass transom
- For double glass door applications



PF165	-	630
MODEL		FINISH

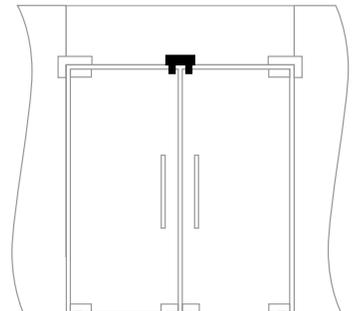

## WALL MOUNT TRANSOMS


### WALL MOUNT TRANSOM PATCH FITTING WITH PIVOT

#### PF130, PF131


- 1 year limited warranty, 220lbs (100kg) capacity
- Includes regular machine screws & anchors
- Regular model (#PF130) recommended for use with top door patch fitting #PF120
- Extended model (#PF131) recommended for use with #PF100DC or #PF102DC door closer and #PF121 patch fitting



PF130-630



PF130	-	630
MODEL		FINISH




### WALL MOUNT TRANSOM PATCH FITTING WITH DOOR STOP

#### PF163, PF164


- 1 year limited warranty, 220lbs (100kg) capacity
- Includes regular machine screws & anchors
- Extended model (#PF164) recommended for use with #PF100DC or #PF102DC door closer and #PF121 patch fitting



PF163-630

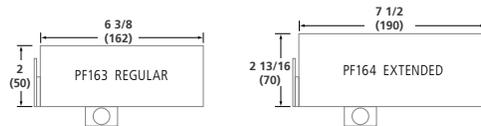

PF163	-	630
MODEL		FINISH



## PARTS & ACCESSORIES



**PF120TP1**  
Top pivot, available in matte black (19) on special order.



**PF120TP2**  
Walking beam pivot



**PF110BP1**  
Bottom pivot



**PF165CM-630**  
Mounted Door Stop  
Cast stainless steel. Includes mounting screws and plastic anchors.

# DOOR LOCKS



## PATCH LOCKS



**PF210**  
PASSAGE



**PF251**  
ENTRY (KIK CYLINDER)



### PF210, PF251



- 1 year limited warranty
- Handed, field reversible\*
- Entry function model with 5 pin KIK cylinder with Schlage "C" keyway and thumb-turn included
- Made of high strength zinc casting alloy and stainless steel covers
- For glass doors  $\frac{5}{16}$ – $\frac{1}{2}$ " (8–12.7 mm) thick
- Latch bolt with  $\frac{1}{2}$ " (12 mm) throw
- Architectural lever styles available (special order), see page 16
- Patch fitting strike for wood or aluminum frame strike available (sold separately) - see page 14
- Mounting hardware shims and gaskets included

PF210	LH	-	630
MODEL	HAND		FINISH


630  
SATIN STAINLESS  
STEEL

19  
MATTE BLACK\*

- \* Handing conversion is possible only from:
- » Left hand to Right hand (vice versa)
  - » Left hand reverse to Right hand reverse (vice versa)



### Handing conversion

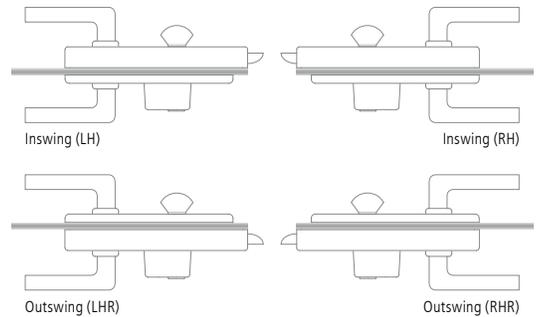

# GLASS DOOR LOCKS

## PATCH LOCKS & PATCH LOCKS STRIKE



LEFT HAND



LEFT HAND REVERSED



SILENT LATCH

### PF251P




- 1 year limited warranty
- Handed, field reversible\*
- Entry function model with profile cylinder housing for 5-pin Schlage "SC1" keyway (profile cylinder sold separately)
- Made of high strength zinc casting alloy and stainless steel covers
- For glass doors  $\frac{5}{16}$ – $\frac{1}{2}$ " (8–12.7 mm) thick
- Latch bolt with  $\frac{1}{2}$ " (12 mm) throw
- Architectural lever styles available (special order), see page 15
- Patch fitting strike for wood or aluminum frame strike available (sold separately)
- Mounting hardware and gaskets included
- For master key system (MK) use cylinder Viro 9203

PF251P	LH	–	630
MODEL	HAND		FINISH


630  
SATIN STAINLESS  
STEEL

19  
MATTE BLACK\*

- \* Handing conversion is possible only from:  
 » Left hand to Right hand (vice versa)  
 » Left hand reverse to Right hand reverse (vice versa)

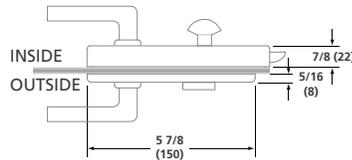

### Handing conversion

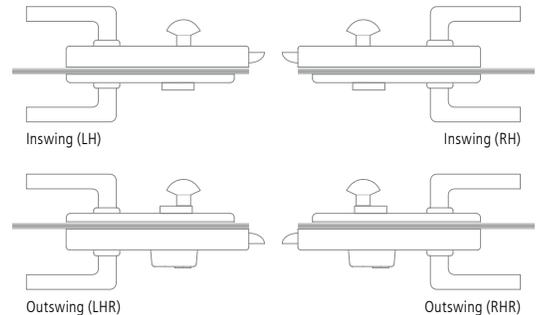

### PF200

- 1 year limited warranty
- Patch fitting lock strike for glass sidelight or double glass doors





PF200-630

PF200	–	630
MODEL		FINISH

630  
SATIN STAINLESS  
STEEL

19  
MATTE BLACK\*





## FLOOR DEADBOLTS



### PF181

- 1 year limited warranty
- For glass doors  $\frac{5}{16}$ – $\frac{1}{2}$ " (8–12.7 mm) thick
- Floor bolt with  $\frac{11}{16}$ " (17.5 mm) throw
- 5-pin double profile cylinder with 3 keys, Yale keyway
- For master keys system (MK) use cylinder Viro 9203 (Not for the PF180)
- Mounting hardware, gaskets and floor strike included

PF181	–	630
MODEL		FINISH

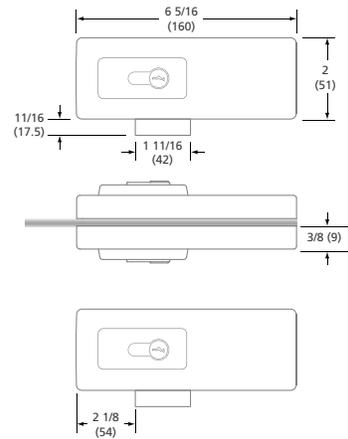



PF181 - FLOOR DEADBOLT



### PF180 (SPECIAL ORDER)

- 1 year limited warranty
- For glass doors  $\frac{5}{16}$ – $\frac{1}{2}$ " (8–12.7 mm) thick
- Floor bolt with  $\frac{9}{16}$ " (15 mm) throw
- 4-pin double profile cylinder with 3 keys, Yale keyway
- Mounting hardware, gaskets and floor strike included
- Can be used with dust proof strike T840 & DSP / DSPL, see page 16

PF180	–	630
MODEL		FINISH

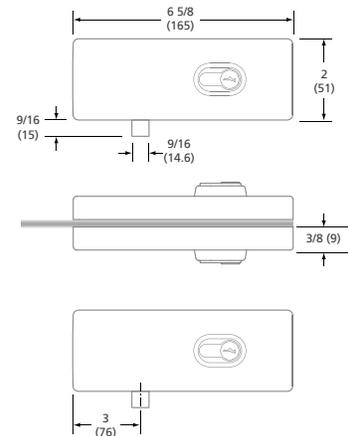

PF180 - FLOOR DEADBOLT

# GLASS DOOR LOCKS

## PARTS & ACCESSORIES



**PFL001-32D**  
Straight lever style (sold in pairs)



**CBPT1530-SCKD-15**  
Schlage "C" keyway with thumb-turn for LH or RH locks



**9203 (Optional)**  
Viro profile cylinder, brass plated for MK system with PF181 & PF251P



**ASAC15**  
Strike for 1 3/4" to 2" (44.5 mm to 50 mm) door frame



**PFL018-32D**  
Curved lever style (sold in pairs)



**CBPT3131-SCKD-15**  
Schlage "C" keyway with thumb-turn for LHR, RHR or PF181 locks



**T840 Dust Proof Strike**  
Aluminum, spring loaded plunger 3/4" (19 mm) inside depth. Can be used with PF180



**DSP / DSPL Dust Proof Strike**  
Stainless steel, spring loaded plunger 3/4" (19 mm) inside depth. Available with locking (#DPSL) or non-locking (#DPS) plunger



**LS01**  
For metal door frames 1 3/4" to 2" (44.5 mm to 50 mm) thick. Includes dust-box, mounting plate and machine screws.

The image displays three distinct architectural door pull designs against a dark, neutral background. The top pull is a brushed metal T-shaped bar with a rectangular stem. The middle pull is a smooth, cylindrical rod with a matching cylindrical stem. The bottom pull is a brushed metal rectangular bar with a rectangular stem. All components exhibit a clean, industrial aesthetic with sharp edges and a consistent metallic finish.

ARCHITECTURAL  
DOOR PULLS

# ARCHITECTURAL DOOR PULLS

## DOREX 19R-E SERIES

LADDER PULLS, ROUND, 1 1/4" DIAMETER



### APPLICATIONS

- For wood or metal doors 1 3/8–2 1/4" (35–57 mm) thick
- For glass doors 5/16–1/2" (8–13 mm) thick

### FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Packaged in an eco-friendly, fully recyclable, box



Single pulls are thru-bolt mounted with round end-caps


### SELECTION GUIDE

SERIES	LENGTH†	DIAMETER	TYPE	FINISH	DESCRIPTION
19R	24	E	B	630	Ladder Pull, 1 1/4" (32 mm) Round, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	12, 24, 36 48, 60, 72	E 1-1/4 (32)	B Back-to-Back S Single	630 Satin Stainless Steel 19 Matte black	

IN (MM), (†) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.

### DIMENSIONS

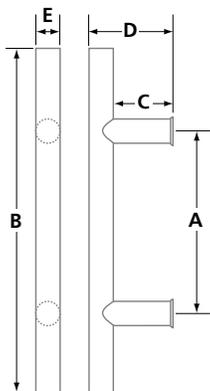

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E DIAMETER
<b>19R12</b>	12 (305)	24 (610)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>19R24</b>	24 (610)	36 (915)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>19R36</b>	36 (915)	48 (1220)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>19R48</b>	48 (1220)	60 (1524)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>19R60</b>	60 (1524)	72 (1829)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>19R72</b>	72 (1829)	84 (2134)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)

IN (MM)

## DOREX 19R-E45 SERIES

LADDER PULLS, ROUND, 1 1/4" DIAMETER, OFFSET POSTS



### APPLICATIONS

- For wood or metal doors 1 3/8–2 1/4" (35–57 mm) thick
- For glass doors 5/16–1/2" (8–13 mm) thick

### FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Pull is offset for better functionality & aesthetics
- Simplified Stock Management: Convert Back-to-Back Pairs to Singles, & vice-versa (kit sold separately)
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Matching color washers for black pulls
- Offset clearance 2 25/32" (70.6 mm)



### SELECTION GUIDE

SERIES	LENGTH*	DIAMETER	TYPE	OPTION	FINISH	DESCRIPTION
19R	24	E	B	45	630	Ladder Pull, 1 1/4" (32mm) Round, 24" Center-to-Center, Back-to-Back, 45°, Satin Stainless Steel
	12, 24, 36 48, 60, 72	E 1-1/4 (32)	B Back-to-Back S Single	45 45 Degree	630 Satin Stainless Steel 19 Matte black	

IN (MM), (\*) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.




Single pulls are thru-bolt mounted with round end-caps

### ACCESSORIES

19R45-B2B2SING-KIT-630	Kit to Reconfigure 1x 19R45-B2B PAIR to 2x 19R45-SINGLE-630
19R45-B2B2SING-KIT-19	Kit to Reconfigure 1x 19R45-B2B PAIR to 2x 19R45-SINGLE-19
19R45-2SING2B2B-KIT-630	Kit to Reconfigure 2x 19R45-SINGLE to 1x 19R45-B2B PAIR-630
19R45-2SING2B2B-KIT-19	Kit to Reconfigure 2x 19R45-SINGLE to 1x 19R45-B2B PAIR-19

### DIMENSIONS

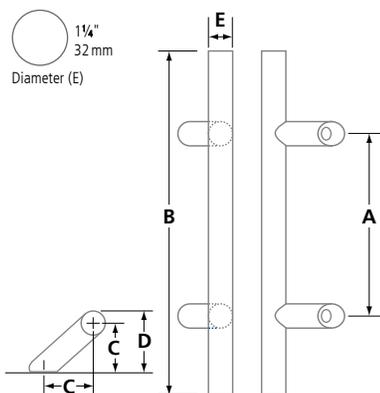

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E DIAMETER
<b>19R12</b>	12 (305)	24 (610)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)
<b>19R24</b>	24 (610)	36 (915)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)
<b>19R36</b>	36 (915)	48 (1220)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)
<b>19R48</b>	48 (1220)	60 (1524)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)
<b>19R60</b>	60 (1524)	72 (1829)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)
<b>19R72</b>	72 (1829)	84 (2134)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)

IN (MM)

# ARCHITECTURAL DOOR PULLS

## DOREX 19R-E 316 SERIES

LADDER PULLS, ROUND, 1 1/4" DIAMETER, 316 MARINE GRADE



### APPLICATIONS

- For wood or metal doors 1 3/8–2 1/4" (35–57 mm) thick
- For glass doors 5/16– 1/2" (8–13 mm) thick
- Ideal for outdoor use

### FEATURES

- Marine grade, 316 stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Packaged in an eco-friendly, fully recyclable, box



Single pulls are thru-bolt mounted with round end-caps


### SELECTION GUIDE

SERIES	LENGTH†	DIAMETER	TYPE	FINISH	DESCRIPTION
19R	24	E	B	316	Ladder Pull, 1 1/4" (32mm) Round, 24" Center-to-Center, Back-to-Back, 316 Satin Stainless Steel
	12, 24, 36 48, 60	E 1-1/4 (32)	B Back-to-Back S Single	316 Satin Stainless Steel	

IN (MM), †) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.

### DIMENSIONS

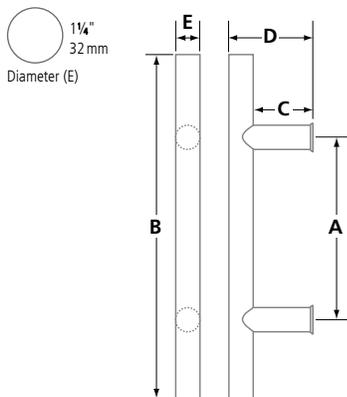

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E DIAMETER
<b>19R12</b>	12 (305)	24 (610)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>19R24</b>	24 (610)	36 (915)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>19R36</b>	36 (915)	48 (1220)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>19R48</b>	48 (1220)	60 (1524)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>19R60</b>	60 (1524)	72 (1829)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)

IN (MM)

## DOREX 19Q-E SERIES LADDER PULLS, SQUARE, 1 1/4"



### APPLICATIONS

- For wood or metal doors 1 3/8–2 1/4" (35–57 mm) thick
- For glass doors 5/16– 1/2" (8–13 mm) thick

### FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Packaged in an eco-friendly, fully recyclable, box



### SELECTION GUIDE

SERIES	LENGTH†	DIAMETER	TYPE	FINISH	DESCRIPTION
19Q	24	E	B	630	Ladder Pull, 1 1/4" (32 mm) Square, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	12, 24, 36	E 1-1/4 (32)	B Back-to-Back	630 Satin Stainless Steel	
	48, 60, 72		S Single	19 Matte black	


IN (MM), †) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.



Single pulls are thru-bolt mounted with round end-caps

### DIMENSIONS

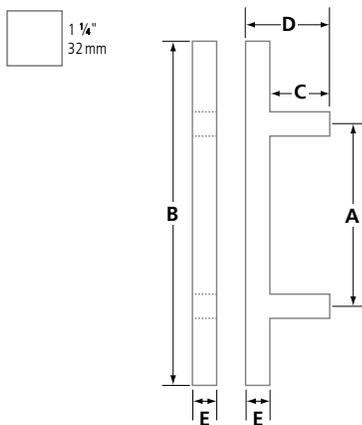

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E GRIP
<b>19Q12</b>	12 (305)	24 (610)	2 7/16 (62)	3 1/16 (94)	1 1/4 (32)
<b>19Q24</b>	24 (610)	36 (915)	2 7/16 (62)	3 1/16 (94)	1 1/4 (32)
<b>19Q36</b>	36 (915)	48 (1220)	2 7/16 (62)	3 1/16 (94)	1 1/4 (32)
<b>19Q48</b>	48 (1220)	60 (1524)	2 7/16 (62)	3 1/16 (94)	1 1/4 (32)
<b>19Q60</b>	60 (1524)	72 (1829)	2 7/16 (62)	3 1/16 (94)	1 1/4 (32)
<b>19Q72</b>	72 (1829)	84 (2134)	2 7/16 (62)	3 1/16 (94)	1 1/4 (32)

IN (MM)

# ARCHITECTURAL DOOR PULLS

## DOREX 18R-E SERIES

STRAIGHT ROUND PULLS, MITERED, 1 1/4" DIAMETER



### APPLICATIONS

- For wood or metal doors 1 3/8 – 2 1/4" (35–57 mm) thick
- For glass doors 5/16 – 1/2" (8–13 mm) thick

### FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Packaged in an eco-friendly, fully recyclable, box



### SELECTION GUIDE


SERIES	LENGTH†	DIAMETER	TYPE	FINISH	DESCRIPTION
18R	24	E	B	630	Straight Round Pull, 1 1/4" (32 mm) Mitered, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	36	E	B	630	
	48, 60, 72	E	S	19	

IN (MM), †) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.



Single pulls are thru-bolt mounted with round end-caps

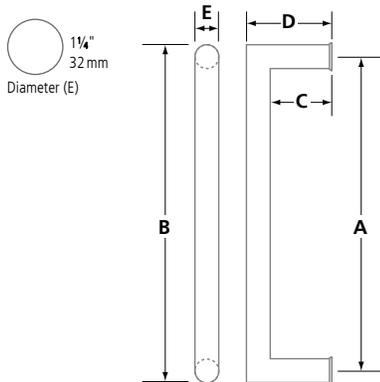

### DIMENSIONS

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E DIAMETER
<b>18R24</b>	24 (610)	25 1/4 (641)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>18R36</b>	36 (915)	37 1/4 (946)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>18R48</b>	48 (1220)	49 1/4 (1251)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>18R60</b>	60 (1524)	61 1/4 (1556)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>18R72</b>	72 (1829)	73 1/4 (1861)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)

IN (MM)

## DOREX 18Q-E SERIES STRAIGHT SQUARE PULLS, MITERED, 1 1/4"



### APPLICATIONS

- For wood or metal doors 1 3/8– 2 1/4" (35–57 mm) thick
- For glass doors 5/16– 1/2" (8–13 mm) thick

### FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Packaged in an eco-friendly, fully recyclable, box



630  
SATIN STAINLESS  
STEEL



19  
MATTE BLACK

### SELECTION GUIDE


SERIES	LENGTH†	DIAMETER	TYPE	FINISH	DESCRIPTION
18Q	24	E	B	630	Straight Square Pull, 1 1/4" (32 mm) Mitered, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	24, 36 48, 60, 72	E 1-1/4 (32)	B Back-to-Back S Single	630 Satin Stainless Steel 19 Matte black	

IN (MM), †) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.



Single pulls are thru-bolt mounted with round end-caps

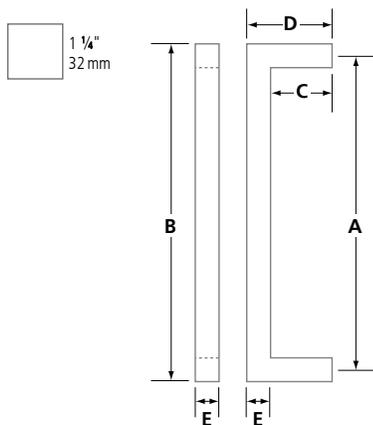

### DIMENSIONS

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E GRIP
<b>18Q24</b>	24 (610)	25 1/4 (641)	27/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>18Q36</b>	36 (915)	37 1/4 (946)	27/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>18Q48</b>	48 (1220)	49 1/4 (1251)	27/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>18Q60</b>	60 (1524)	61 1/4 (1556)	27/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>18Q72</b>	72 (1829)	73 1/4 (1861)	27/16 (62)	3 11/16 (94)	1 1/4 (32)

IN (MM)

# ARCHITECTURAL DOOR PULLS

## DOREX 18T-F SERIES

STRAIGHT RECTANGULAR PULLS, MITERED, 1½" x 1"



### APPLICATIONS

- For wood or metal doors 1¾– 2¼" (35–57mm) thick
- For glass doors ⅝– ½" (8–13 mm) thick

### FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Packaged in an eco-friendly, fully recyclable, box



### SELECTION GUIDE

SERIES	LENGTH†	DIMENSION	TYPE	FINISH	DESCRIPTION
18T	24	F	B	630	Straight Rectangular Pull, 1½x1" (38x25.4mm) Mitered, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	24, 36 48, 60, 72	F 1-1/2x1 (38x25.4)	B Back-to-Back S Single	630 Satin Stainless Steel 19 Matte black	

IN (MM), † CENTER-TO-CENTER.


NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.



Single pulls are thru-bolt mounted with round end-caps



1 ½x1"  
38x25.4mm

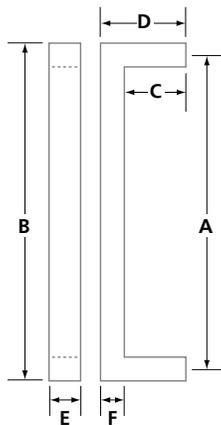

### DIMENSIONS

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E GRIP WIDTH	F GRIP HEIGHT
<b>18T24</b>	24 (610)	25 (635)	2⅝ (67)	3⅝ (92.4)	1½ (38)	1 (25.4)
<b>18T36</b>	36 (915)	37 (940)	2⅝ (67)	3⅝ (92.4)	1½ (38)	1 (25.4)
<b>18T48</b>	48 (1220)	49 (1245)	2⅝ (67)	3⅝ (92.4)	1½ (38)	1 (25.4)
<b>18T60</b>	60 (1524)	61 (1549)	2⅝ (67)	3⅝ (92.4)	1½ (38)	1 (25.4)
<b>18T72</b>	72 (1829)	73 (1854)	2⅝ (67)	3⅝ (92.4)	1½ (38)	1 (25.4)

IN (MM)

## DOREX 20R-E SERIES

OFFSET ROUND D-PULLS, MITERED, 1 1/4" DIAMETER



### APPLICATIONS

- For wood or metal doors 1 3/8–2 1/4" (35–57 mm) thick
- For glass doors 5/16–1/2" (8–13 mm) thick

### FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Packaged in an eco-friendly, fully recyclable, box



630  
SATIN STAINLESS  
STEEL



19  
MATTE BLACK

### SELECTION GUIDE


SERIES	LENGTH†	DIAMETER	TYPE	FINISH	DESCRIPTION
20R	24	E	B	630	Offset Round D-Pull, 1 1/4 (32 mm) Mitered, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel Finish
	10, 24, 36 48, 60	E 1-1/4 (32)	B Back-to-Back S Single	630 Satin Stainless Steel 19 Matte black	

IN (MM), †) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.



Single pulls are thru-bolt mounted with round end-caps

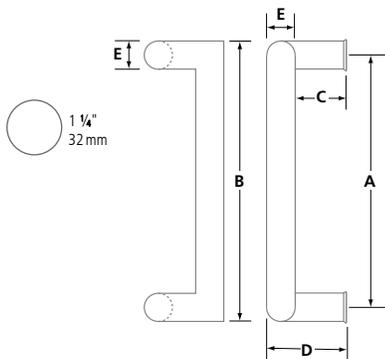

### DIMENSIONS

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E DIAMETER
<b>20R10</b>	10 (254)	11 1/4 (286)	27/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>20R24</b>	24 (609.6)	25 1/4 (641)	27/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>20R36</b>	36 (914.4)	37 1/4 (946)	27/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>20R48</b>	48 (1219.2)	49 1/4 (1251)	27/16 (62)	3 11/16 (94)	1 1/4 (32)
<b>20R60</b>	60 (1524)	61 1/4 (1556)	27/16 (62)	3 11/16 (94)	1 1/4 (32)

IN (MM)

# ARCHITECTURAL DOOR PULLS

## DOREX 18T-F SERIES

STRAIGHT RECTANGULAR PULLS, MITERED, 1½" x 1"



### APPLICATIONS

- For wood or metal doors 1⅜–2¼" (35–57 mm) thick
- For glass doors ⅝–½" (8–13 mm) thick

### FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Can be installed on 2" (51 mm) aluminum doors and frame with ½" (12.7 mm) door stop
- Packaged in an eco-friendly, fully recyclable, box



### SELECTION GUIDE


SERIES	LENGTH†	DIMENSION	TYPE	FINISH	DESCRIPTION
20T	24	E	B	630	Offset Rectangular D-Pull, 1¼x¾" (32x19 mm) Mitered, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	10, 24, 36 48, 60	E 1-1/4x3/4 (32x19)	B Back-to-Back S Single	630 Satin Stainless Steel 19 Matte black	

IN (MM), †) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.



Single pulls are thru-bolt mounted with round end-caps

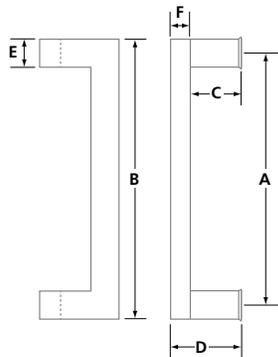

### DIMENSIONS

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E GRIP WIDTH	F GRIP HEIGHT
<b>20T10</b>	10 (254)	11¼ (286)	2⅛ (68)	3⁄₁₆ (87)	1¼ (32)	¾ (19)
<b>20T24</b>	24 (609.6)	25¼ (641)	2⅛ (68)	3⁄₁₆ (87)	1¼ (32)	¾ (19)
<b>20T36</b>	36 (914.4)	37¼ (946)	2⅛ (68)	3⁄₁₆ (87)	1¼ (32)	¾ (19)
<b>20T48</b>	48 (1219.2)	49¼ (1251)	2⅛ (68)	3⁄₁₆ (87)	1¼ (32)	¾ (19)
<b>20T60</b>	60 (1524)	61¼ (1556)	2⅛ (68)	3⁄₁₆ (87)	1¼ (32)	¾ (19)

IN (MM)

## DOREX 18R-B SERIES

STRAIGHT ROUND PULLS, MITERED, 3/4" DIAMETER



### APPLICATIONS

- For wood or metal doors & panels 1 3/8– 2 1/4" (35–57 mm) thick
- For glass doors 5/16– 1/2" (8–13 mm) thick
- Ideal for millwork/cabinet applications

### FEATURES

- Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included



### SELECTION GUIDE

SERIES	LENGTH*	DIAMETER	TYPE	FINISH	DESCRIPTION
18R	24	B	B	630	Straight Round Pull, 3/4" (19 mm) Mitered, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	12, 16, 24	B 3/4 (19)	B Back-to-Back S Single	630 Satin Stainless Steel 19 Matte black	

IN (MM), (†) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.




Single pulls are thru-bolt mounted with round end-caps



### 18R-BWBB-KIT-630 BOWL WASHERS

- Replaces included washers for an optional aesthetic look
- 2 Washers per kit

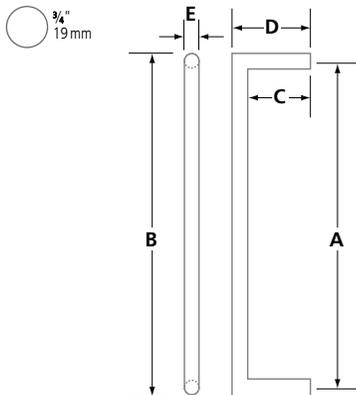

### DIMENSIONS

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E DIAMETER
<b>18R12</b>	11 13/16 (300)	12 9/16 (319)	1 3/4 (44)	2 1/2 (63.5)	3/4 (19)
<b>18R16</b>	15 3/4 (400)	16 1/2 (419)	1 3/4 (44)	2 1/2 (63.5)	3/4 (19)
<b>18R24</b>	23 5/8 (600)	24 3/8 (619)	1 3/4 (44)	2 1/2 (63.5)	3/4 (19)

IN (MM)

# ARCHITECTURAL DOOR PULLS

## DOREX 19R-B SERIES

### LADDER ROUND PULLS, 3/4" DIAMETER



#### APPLICATIONS

- For wood or metal doors & panels 1 3/8"– 2 1/4" (35–57 mm) thick
- For glass doors 5/16"– 1/2" (8–13 mm) thick
- Ideal for millwork/cabinet applications

#### FEATURES

- Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included



630  
SATIN STAINLESS  
STEEL



19  
MATTE BLACK

#### SELECTION GUIDE

SERIES	LENGTH†	DIAMETER	TYPE	FINISH	DESCRIPTION
19R	24	B	B	630	Ladder Pull, 3/4" (19 mm) Round, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	12, 16, 24	B 3/4 (19)	B Back-to-Back S Single	630 Satin Stainless Steel 19 Matte black	

IN (MM), (†) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.



Single pulls are thru-bolt mounted with round end-caps




#### 18R-BWBB-KIT-630 BOWL WASHERS

- Replaces included washers for an optional aesthetic look
- 2 Washers per kit



3/4"  
19 mm

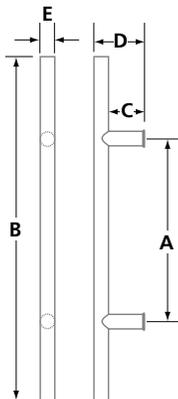

#### DIMENSIONS

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E DIAMETER
<b>19R12</b>	11 13/16 (300)	17 3/4 (450)	1 3/4 (44)	2 1/2 (63.5)	3/4 (19)
<b>19R16</b>	15 3/4 (400)	21 5/8 (550)	1 3/4 (44)	2 1/2 (63.5)	3/4 (19)
<b>19R24</b>	21 5/8 (550)	27 9/16 (700)	1 3/4 (44)	2 1/2 (63.5)	3/4 (19)

IN (MM)

# FLOOR STOPS



# FLOOR STOPS

## FLOOR STOPS




T200 C26D



T201 C26D  
RISER

### T200, T201 DOME STOP-LOW

- For use with low or no threshold
- Heavy-duty zinc die-cast
- Non-marking rubber stop
- Mounting hardware included: wood screw and plastic anchor



MODEL	FINISH	A	B	øC	D	E	øF	/BOX	/CASE
<b>T200</b>	C3, C4, C26D	1 (25.4)	7/8 (22.2)	1 3/4 (44.5)	3/4 (19.1)	3/32 (2.4)	3/16 (4.8)	10	200
<b>T201*</b>	C26D	—	—	1 3/4 (44.5)	—	1/4 (6.4)	—	50	500


IN (MM), (\*) RISER ALLOWS EASY CONVERSION TO THRESHOLD OR CARPET USE



T218 C26D

### T218 DOME STOP-HIGH

- For use with a threshold or undercut doors
- Heavy-duty zinc die-cast
- Non-marking rubber stop
- Includes wood screw and plastic anchor



MODEL	FINISH	A	B	øC	D	E	øF	/BOX	/CASE
<b>T218</b>	C3, C4, C26D	1 7/16 (36.5)	7/8 (22.2)	1 3/4 (44.5)	3/4 (19.1)	1/2 (12.7)	3/16 (4.8)	10	200


IN (MM)



C229 C26D

### C229 DOME STOP-UNIVERSAL

- For use with or without threshold
- Heavy-duty zinc die-cast
- Non-marking rubber stop
- Mounting hardware included: wood screw and plastic anchor



MODEL	FINISH	A	B	øC	D	E	øF	/BOX	/CASE
<b>C229</b>	C26D	1 7/16 (36.5)	1 5/16 (20.6)	1 3/4 (44.5)	7/16 (11)	1/8 (3.2)	7/32 (5.6)	10	200


IN (MM)



C230-26D

### C230 SPRING STOP-UNIVERSAL

- For interior use with or without threshold
- Zinc die-cast body
- Spring loaded non-marking rubber stop
- Mounting hardware included: wood screw and anchor



MODEL	FINISH	A	B	øC	D	E	øF	/BOX
<b>C230</b>	19, 26D	1 1/2 (38)	1 5/16 (24)	1 7/8 (47.4)	1 3/16 (21)	7/32 (6)	7/32 (5.6)	100

IN (MM)


FLOOR STOPS



3536-630

**3536-630 SQUARE DOOR STOP**

- For interior use
- Stainless steel, satin finish
- Mounting hardware included: wood screw and anchor

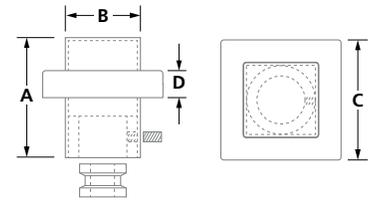

MODEL	FINISH	A	B	C	D	/UNIT
3536	630	1 <sup>9</sup> / <sub>16</sub> (40)	1 (25)	1 <sup>9</sup> / <sub>16</sub> (40)	9 <sup>1</sup> / <sub>16</sub> (14)	1


IN (MM)



3530-26D

**3530-26D COLUMN DOOR STOP**

- For interior use
- Omni-directional stop
- Solid brass
- Mounting hardware included: wood screw with plastic anchor

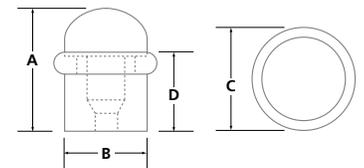

MODEL	FINISH	A	øB	øC	D	/BOX
3530	19, 26D	1 <sup>3</sup> / <sub>4</sub> (44.5)	1 <sup>3</sup> / <sub>16</sub> (30.2)	1 <sup>7</sup> / <sub>16</sub> (36.5)	1 <sup>1</sup> / <sub>16</sub> (28)	10


IN (MM)



3531-26D

**3531-26D COLUMN DOOR STOP**

- For interior use
- Omni-directional stop
- Solid brass
- Mounting hardware included: wood and machine screws with masonry and plastic anchors

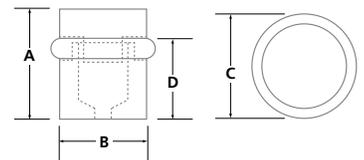

MODEL	FINISH	A	øB	øC	D	/BOX
3531	26D	1 <sup>17</sup> / <sub>32</sub> (39)	1 <sup>3</sup> / <sub>16</sub> (30.2)	1 <sup>3</sup> / <sub>8</sub> (35)	1 <sup>9</sup> / <sub>64</sub> (29)	10


IN (MM)



3532-32D

**3532-32D COLUMN DOOR STOP**

- For interior or exterior use
- Omni-directional stop
- Stainless steel
- Mounting hardware included: threaded bolt with masonry anchor

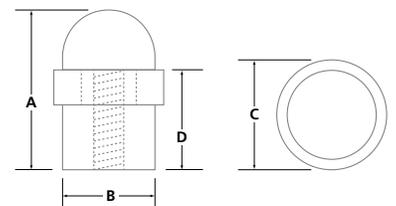

MODEL	FINISH	A	øB	øC	D	/BOX
3532	32D	2 (50.8)	1 <sup>3</sup> / <sub>16</sub> (30.2)	1 <sup>3</sup> / <sub>8</sub> (35)	1 <sup>3</sup> / <sub>8</sub> (35)	10

IN (MM)

The Door  
Hardware  
Professionals

