


DOREX MORTISE LOCKS

SECURITY HARDWARE

DOREX DL2400 DEADLATCH LOCK

DL24

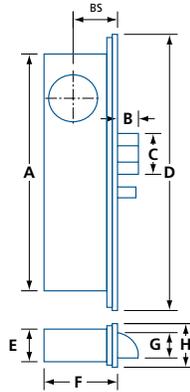


- Heavy zinc plated steel construction
- Chrome plated latch bolt with Delrin insert for smooth, quiet latching
- ½" (12.7 mm) latch throw
- Zinc alloy dead locking pin
- Left or right handed, field reversible
- Cylinder backset: ¾" (24.6 mm) or 1 ⅛" (28.6 mm)
- Lock accepts standard 1 ⅝" (29.4 mm) diameter mortise cylinder with cam A (Adams Rite type)
- Key or turn-button controlled latch dogging
- Radius anodized aluminum (#FP32) faceplate included
- Strike not included
- Other faceplates, strikes, and accessories available, see page 05.203

MODEL	FINISH	HANDING	BS	A	B	C	D	E	F	G	H	/CASE
DL2412-2	AL, DU	LH	¾" (24.6)	5 ⅞" (148.1)	½" (12.7)	1 (25.3)	6 ⅞" (174.6)	⅞" (22.2)	1 ⅝" (41.3)	⅝" (16.2)	1 (25.4)	25
DL2422-2	AL, DU	RH										
DL2413-2	AL, DU	LH	1 ⅛" (28.6)	5 ⅞" (148.1)	½" (12.7)	1 (25.3)	6 ⅞" (174.6)	⅞" (22.2)	1 ¾" (44.5)	⅝" (16.2)	1 (25.4)	25
DL2423-2	AL, DU	RH										

IN (MM)

DOREX DL2500 DEADLATCH LOCK – HEAVY DUTY

DL25

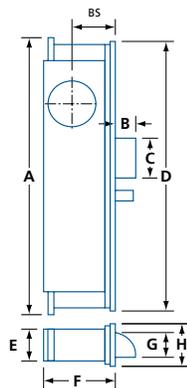

- Heavy zinc plated steel construction
- Adjustable mounting studs for easy lock alignment
- Solid zinc alloy latch bolt with ½" (12.7 mm) throw
- Zinc alloy dead locking pin
- Left or right handed, field reversible
- Cylinder backset: ¾" (24.6 mm) or 1 ⅛" (28.6 mm)
- Lock accepts standard 1 ⅝" (29.4 mm) diameter mortise cylinder with cam A (Adams Rite type)
- Key or turn-button controlled latch dogging
- Radius anodized aluminum (#FP32) faceplate included
- Strike not included
- Other faceplates, strikes, and accessories available, see page 05.203

MODEL	FINISH	HANDING	BS	A	B	C	D	E	F	G	H	/CASE
DL2512-2	AL, DU	LH	¾" (24.6)	7 (177.8)	½" (12.7)	1 (25.4)	6 ⅞" (174.6)	⅞" (22.5)	1 ⅞" (40.6)	⅝" (15.7)	1 (25.4)	25
DL2522-2	AL, DU	RH										
DL2513-2	AL, DU	LH	1 ⅛" (28.6)	7 (177.8)	½" (12.7)	1 (25.4)	6 ⅞" (174.6)	⅞" (22.5)	1 ¾" (44.5)	⅝" (15.7)	1 (25.4)	25
DL2523-2	AL, DU	RH										

IN (MM)