


DOREX MORTISE LOCKS

SECURITY HARDWARE

DOREX DL2400 DEADLATCH LOCK

DL24

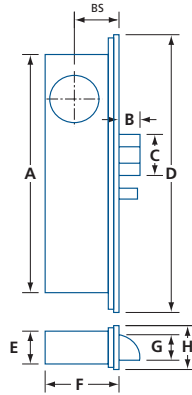


- Heavy zinc plated steel construction
- Chrome plated latch bolt with Delrin insert for smooth, quiet latching
- ½" (12.7 mm) latch throw
- Zinc alloy dead locking pin
- Left or right handed, field reversible
- Cylinder backset: ¾" (24.6 mm) or 1 1/8" (28.6 mm)
- Lock accepts standard 1 5/32" (29.4 mm) diameter mortise cylinder with cam A (Adams Rite type)
- Key or turn-button controlled latch dogging
- Radius anodized aluminum (#FP32) faceplate included
- Other faceplates available, see page 05.203

MODEL	FINISH	HANDING	BS	A	B	C	D	E	F	G	H	/CASE
DL2412	AL, DU	LH	¾" (24.6)	5 27/32" (148.1)	½" (12.7)	1 (25.3)	6 7/8" (174.6)	7/8" (22.2)	1 19/32" (40.6)	5/8" (16.2)	1 (25.4)	25
DL2422	AL, DU	RH	¾" (24.6)	5 27/32" (148.1)	½" (12.7)	1 (25.3)	6 7/8" (174.6)	7/8" (22.2)	1 19/32" (40.6)	5/8" (16.2)	1 (25.4)	25
DL2413	AL, DU	LH	1 1/8" (28.6)	5 27/32" (148.1)	½" (12.7)	1 (25.3)	6 7/8" (174.6)	7/8" (22.2)	1 19/32" (40.6)	5/8" (16.2)	1 (25.4)	25
DL2423	AL, DU	RH	1 1/8" (28.6)	5 27/32" (148.1)	½" (12.7)	1 (25.3)	6 7/8" (174.6)	7/8" (22.2)	1 19/32" (40.6)	5/8" (16.2)	1 (25.4)	25

IN (MM)

DOREX DL2500 DEADLATCH LOCK – HEAVY DUTY

DL25

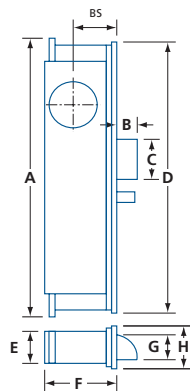

- Heavy zinc plated steel construction
- Adjustable mounting studs for easy lock alignment
- Solid zinc alloy latch bolt with ½" (12.7 mm) throw
- Zinc alloy dead locking pin
- Left or right handed, field reversible
- Cylinder backset: ¾" (24.6 mm) or 1 1/8" (28.6 mm)
- Lock accepts standard 1 5/32" (29.4 mm) diameter mortise cylinder with cam A (Adams Rite type)
- Key or turn-button controlled latch dogging
- Radius anodized aluminum (#FP32) faceplate included
- Other faceplates available, see page 05.203

MODEL	FINISH	HANDING	BS	A	B	C	D	E	F	G	H	/CASE
DL2512	AL, DU	LH	¾" (24.6)	7 (177.8)	½" (12.7)	1 (25.4)	6 7/8" (174.6)	7/8" (22.5)	1 5/8" (41.2)	5/8" (15.7)	1 (25.4)	25
DL2522	AL, DU	RH	¾" (24.6)	7 (177.8)	½" (12.7)	1 (25.4)	6 7/8" (174.6)	7/8" (22.5)	1 5/8" (41.2)	5/8" (15.7)	1 (25.4)	25
DL2513	AL, DU	LH	1 1/8" (28.6)	7 (177.8)	½" (12.7)	1 (25.4)	6 7/8" (174.6)	7/8" (22.5)	1 5/8" (41.2)	5/8" (15.7)	1 (25.4)	25
DL2523	AL, DU	RH	1 1/8" (28.6)	7 (177.8)	½" (12.7)	1 (25.4)	6 7/8" (174.6)	7/8" (22.5)	1 5/8" (41.2)	5/8" (15.7)	1 (25.4)	25

IN (MM)